

EMI Suppression Beads (2661375102)



Part Number: 2661375102

61 SHIELD BEAD

Explanation of Part Numbers:

- Digits 1 & 2 = Product Class
- Digits 3 & 4 = Material Grade
- Last digit 1= Not Burnished 2 = Burnished

– The last digit of the Parylene coated part is a "4," which is available upon request. The minimum coating thickness beads is 0.005 mm (0.0002'').

Fair-Rite offers a broad selection of ferrite EMI suppression beads with guaranteed minimum impedance specifications.

Our "Shield Bead Kit" (part number 0199000019) contains a selection of these beads.

For any EMI suppression bead requirement not listed here, feel free to contact our customer service for availability and pricing.

Catalog Drawing 3D Model

The C dimension, the bead length, can be modified to suit specific applications.

<u>Weight:</u> 2.5 (g)

| Dim | mm | mm tol | nominal inch | inch misc. | 1 1 2 3 |
|-----|------|--------|--------------|------------|---------|
| А | 9.5 | ±0.25 | 0.374 | _ | C |
| В | 4.5 | +0.75 | 0.192 | _ | 10 |
| С | 6.35 | ±0.35 | 0.25 | | |






Chart Legend

+ Test frequency

•The column u201cH (Oe)u201d gives for each bead the calculated dc bias field in oersted for 1 turn and 1 ampere direct current. The actual dc H field in the application is this value of

u201cHu201d times the actual NI (ampere-turn) product. For the effect of the dc bias on the impedance of the bead material, see figures 18-23 in the application note How to choose Ferrite Components for EMI Suppression.


| Typical Impedance (Ω) | | | | | |
|------------------------------|-----|--|--|--|--|
| 100 MHz | 53 | | | | |
| 250 MHz^+ | 74 | | | | |
| 500 MHz^+ | 97 | | | | |
| 1000 MHz | 146 | | | | |
| Electrical Properties | | | | | |
| H(Oe) | 0.6 | | | | |

Suppression beads are controlled for impedances only. Minimum impedance values are specified for the + marked frequencies. The minimum impedance is typically the listed impedance less 20%.

Catalog Drawing

Single turn impedance tests for 73 and 43 material beads are performed on the E4990A Impedance Analyzer. The 61 material beads are tested on the E4991A / HP4291B Impedance Analyzer. Beads are tested with the shortest practical wire length.

| Typical Impendance (Ω) | | | | |
|---------------------------------|-----|--|--|--|
| 100 MHz | 42 | | | |
| 250 MHz^+ | 63 | | | |
| 500 $\rm MHz^+$ | 83 | | | |
| 1000 MHz | 117 | | | |

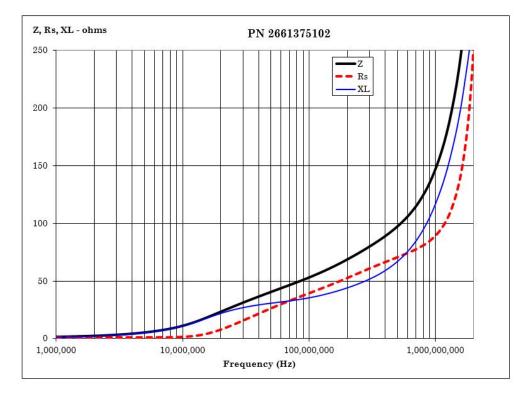

CSV Download

Fair-Rite Products Corp.One Commercial Row, Wallkill, New York 12589-0288888-324-7748845-895-2055Fax: 845-895-2629ferrites@fair-rite.com