

Part Number: 9277010002

77 U CORE

Explanation of Part Numbers: Digits 1&2 = product class, 3&4 = material grade.

The U core offers an economical core design with a nearly uniform cross-sectional area. In a power ferrite material they are frequently used in output chokes, power input filters and transformers for switched-mode power supplies and HF fluorescent ballasts.

□ For any U core requirement not listed in the catalog, please contact our customer service group for availability and pricing.

[Catalog Drawing](#)  
[3D Model](#)

Weight indicated is per pair or set.

Weight: 54 (g)

Dim	mm	mm tol	nominal inch	inch misc.
A	41.70	±0.85	1.62	—
B	20.5	+0.25	0.812	—
C	11.65	±0.25	0.461	—
D	10.95	Min	0.432	Min
E	18.65	Min	0.735	Min
F	35.65	±0.75	1.39	—

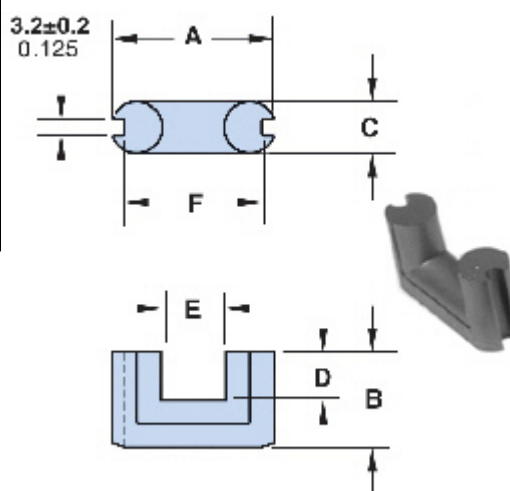



Figure 3

## Chart Legend

•An I core, 9377024002, is available for these U cores. See I Core Section of our catalog.

$\Sigma l/A$  : Core Constant,  $l_e$  : Effective Path Length,  $A_e$  : Effective Cross-Sectional Area,  $V_e$  :

Effective Core Volume

$A_L$  : Inductance Factor 

Electrical Properties	
$A_L(\text{nH})$	1425 Min
$A_e(\text{cm}^2)$	0.98
$\Sigma l/A(\text{cm}^{-1})$	11.8
$l_e(\text{cm})$	11.6
$V_e(\text{cm}^3)$	11.3

□  $A_L$  value is measured at 1kHz, < 10 gauss.

□ These U cores have the same minimum cross-sectional area as the listed effective cross-sectional area.

Fair-Rite Products Corp. • One Commercial Row, Wallkill, New York 12589-0288

888-324-7748 • 845-895-2055 • Fax: 845-895-2629 • [ferrites@fair-rite.com](mailto:ferrites@fair-rite.com) • [www.fair-rite.com](http://www.fair-rite.com)