

Part Number: 9498104002

98 E CORE SET

The E core geometry offers an economical design approach for inductive applications in a variety of power designs.

E cores can be supplied with the center post gapped to a mechanical dimension or an A_L value.

Weight indicated is per pair or set.

Weight: 7.4 (g)

Dim	mm	mm tol	nominal inch	inch misc.
A	20	±0.60	0.787	—
B	9.9	±0.20	0.39	—
C	5.65	±0.25	0.222	—
D	7.2	±0.20	0.283	—
E	14.1	min	0.556	min
F	5.7	±0.20	0.224	—

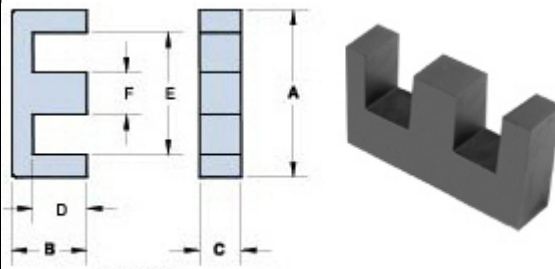


Chart Legend

$\Sigma l/A$: Core Constant, l_e : Effective Path Length, A_e : Effective Cross-Sectional Area, V_e : Effective Core Volume

A_L : Inductance Factor 

Explanation of Part Numbers: Digits 1 & 2 = product class and 3 & 4 = material grade.

Electrical Properties	
A_L (nH)	1450 ±25%
A_e (cm ²)	0.309
$\Sigma l/A$ (cm ⁻¹)	15
l_e (cm)	4.63
V_e (cm ³)	1.43
A_{min} (cm ²)	0.3

Fair-Rite Products Corp. • One Commercial Row, Wallkill, New York 12589-0288
888-324-7748 • 845-895-2055 • Fax: 845-895-2629 • ferrites@fair-rite.com • www.fair-rite.com