

Part Number: 5698261721

98 POT CORE SET


**Pot cores have found application in all types of inductive devices. The core configuration provides a high degree of self-shielding. It also facilitates gapping to enhance utility for a variety of magnetic designs.**

Pot cores can be supplied with the center post gapped to a mechanical dimension or an  $A_L$  value.

Weight indicated is per pair or set.


Weight: 20.000 (g)

Dim	mm	mm tol	nominal inch	inch misc.
A	25.5	±0.50	1.004	—
B	8.05	±0.15	0.317	—
C	17.2	±0.50	0.677	—
D	5.65	±0.20	0.222	—
E	21.6	±0.40	0.85	—
F	11.1	±0.30	0.437	—
G	4.15	±0.50	0.163	—
H	5.4	±0.25	0.213	—

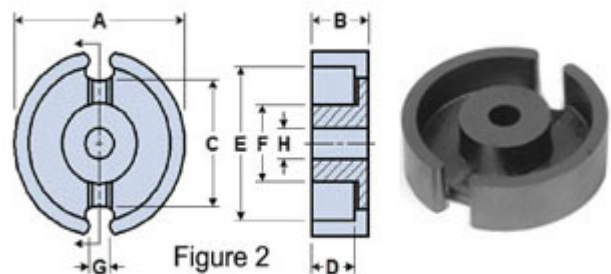

### Chart Legend

$\Sigma l/A$  : Core Constant,  $l_e$  : Effective Path Length,  $A_e$  : Effective Cross-Sectional Area,  $V_e$  : Effective Core Volume

$A_L$  : Inductance Factor 

Explanation of Part Numbers: Digits 1 & 2 = product class and 3 & 4 = material grade.

Electrical Properties	
$A_L$ (nH)	5000 ±25%
$A_e$ (cm <sup>2</sup> )	0.867
$\Sigma l/A$ (cm <sup>-1</sup> )	4.4
$l_e$ (cm)	3.8
$V_e$ (cm <sup>3</sup> )	3.31

Electrical Properties	
$A_{\min}(\text{cm}^2)$	0.74

$A_L$  value is measured at 1 kHz,  $B < 10$  gauss.

Fair-Rite Products Corp. • One Commercial Row, Wallkill, New York 12589-0288  
888-324-7748 • 845-895-2055 • Fax: 845-895-2629 • [ferrites@fair-rite.com](mailto:ferrites@fair-rite.com) • [www.fair-rite.com](http://www.fair-rite.com)