

Part Number: 5678181221

78 POT CORE SET


**Pot cores have found application in all types of inductive devices. The core configuration provides a high degree of self-shielding. It also facilitates gapping to enhance utility for a variety of magnetic designs.**

Pot cores can be supplied with the center post gapped to a mechanical dimension or an  $A_L$  value.

Weight indicated is per pair or set.


Weight: 6.000 (g)

Dim	mm	mm tol	nominal inch	inch misc.
A	18	±0.40	0.709	—
B	5.35	±0.15	0.211	—
C	13.4	±0.40	0.528	—
D	3.8	±0.20	0.15	—
E	14.9	min	0.587	min
F	7.45	±0.15	0.293	—
G	4	±0.30	0.157	—
H	3.2	±0.20	0.126	—

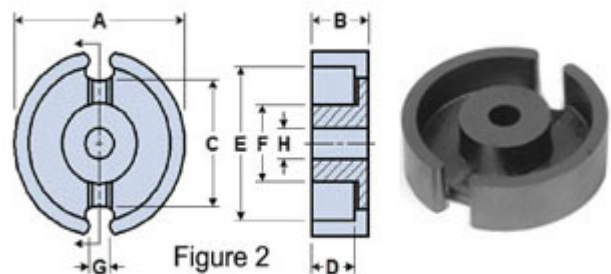

### Chart Legend

$\Sigma l/A$  : Core Constant,  $l_e$  : Effective Path Length,  $A_e$  : Effective Cross-Sectional Area,  $V_e$  : Effective Core Volume

$A_L$  : Inductance Factor 

Explanation of Part Numbers: Digits 1 & 2 = product class and 3 & 4 = material grade.

Electrical Properties	
$A_L$ (nH)	2600 ±25%
$A_e$ (cm <sup>2</sup> )	0.43
$\Sigma l/A$ (cm <sup>-1</sup> )	6
$l_e$ (cm)	2.59
$V_e$ (cm <sup>3</sup> )	1.12

Electrical Properties	
$A_{\min}(\text{cm}^2)$	0.36

$A_L$  value is measured at 1 kHz,  $B < 10$  gauss.

Fair-Rite Products Corp. • One Commercial Row, Wallkill, New York 12589-0288  
888-324-7748 • 845-895-2055 • Fax: 845-895-2629 • [ferrites@fair-rite.com](mailto:ferrites@fair-rite.com) • [www.fair-rite.com](http://www.fair-rite.com)