

Part Number: 9843000104

43 BOBBIN RECTANGULAR

Explanation of Part Numbers:

- Digits 1 & 2 = Product Class
- Digits 3 & 4 = Material Grade
- Last digit 8 = Coated Bobbin

Bobbins are an economical and well-proven core design for many applications where relatively low but stable inductance values are required.

For higher frequency designs, use small bobbins in 43 material® .

For power applications, bobbins in 77 material are specified for  $A_L$  and dc bias limits.

Bobbins in Figures 2-5 can be supplied with a uniform thermo-set plastic coating which can withstand a minimum breakdown of 500Vrms. This coating will change the dimensions a maximum of 0.5 mm (0.020"). The last digit of the thermo-set plastic coated part is an "8".

**For any bobbin requirement not listed in the catalog, please contact our customer service group for availability and pricing.**

[Catalog Drawing](#)

[3D Model](#)

Weight: 3 (g)

Dim	mm	mm tol	nominal inch	inch misc.
A	8.05	±0.20	0.317	—
B	19	±0.40	0.748	—
D	12.7	±0.25	0.5	—
F	5.55	+0.25	0.223	—
G	2.7	+0.25	0.111	—
H	8.05	±0.20	0.317	—

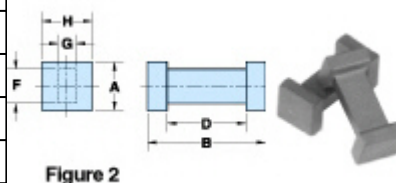



Figure 2

## Chart Legend

$A_L$  : Inductance Factor ,  $N_I$  : Value of dc Ampere-turns,  $A_w$ :Winding Area,  
N/AWG : Number of Turns/Wire Size for Test Coil

---

Electrical Properties	
A <sub>L</sub> (nH)	39.0 ±10%
N/AWG	50/28
A <sub>w</sub> (cm <sup>2</sup> )	0.33

Bobbins are tested for A<sub>L</sub> value at 1kHz < 10 gauss.

Fair-Rite Products Corp. • One Commercial Row, Wallkill, New York 12589-0288  
888-324-7748 • 845-895-2055 • Fax: 845-895-2629 • [ferrites@fair-rite.com](mailto:ferrites@fair-rite.com) • [www.fair-rite.com](http://www.fair-rite.com)