

Part Number: 2843009902

## 43 MULTI-APERTURE CORE

### Explanation of Part Numbers:

- Digits 1 & 2 = Product Class
- Digits 3 & 4 = Material Grade
- Last digit 2 = Burnished

**Multi-aperture cores are used in suppression applications and in balun (balance-unbalance) and other broadband transformers. They are also employed in airbag designs to prevent accidental activation.**

All multi-aperture cores are supplied burnished.

Our “Multi-Aperture Core Kit” (part number 0199000036) is available for prototype evaluation.

**For any multi-aperture requirement not listed here, feel free to contact our customer service group for availability and pricing.**

[Catalog Drawing](#)

[3D Model](#)

Weight: 48 (g)

Dim	mm	mm tol	nominal inch	inch misc.
A	28.7	±0.60	1.13	—
B	28.7	±0.70	1.13	—
C	14.25	±0.30	0.561	—
E	14	±0.30	0.551	—
H	6.35	±0.15	0.25	—

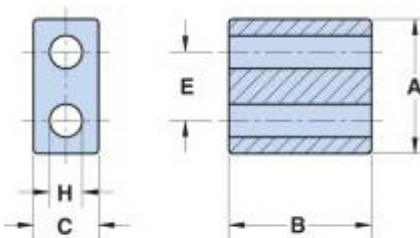


Figure 3

### Chart Legend

+ Test frequency


Typical Impedance ( $\Omega$ )	
25 MHz	425
100 MHz <sup>+</sup>	587

Multi-aperture cores in 73 and 43 materials are controlled for impedance only. The 61 NiZn material is controlled for both impedance and  $A_L$  value. The high frequency 67 material is controlled for  $A_L$  value. Minimum impedance values are specified for the + marked frequencies. The minimum impedance is typically the listed impedance less 20%.

### [Catalog Drawing](#)

Multi-aperture cores in 73 and 43 material are measured for impedance on the E4990A Impedance Analyzer. The 61 and 67 multi-aperture cores are tested on the E4991A / HP4291B Impedance Analyzer. All impedance measurements are performed with a single turn to both holes, using the shortest practical wire length.

The 61 and 67 material multi-hole beads are tested for  $A_L$  value. The test frequency is 10 kHz at < 10 gauss. The test winding is five turns wound through both holes.

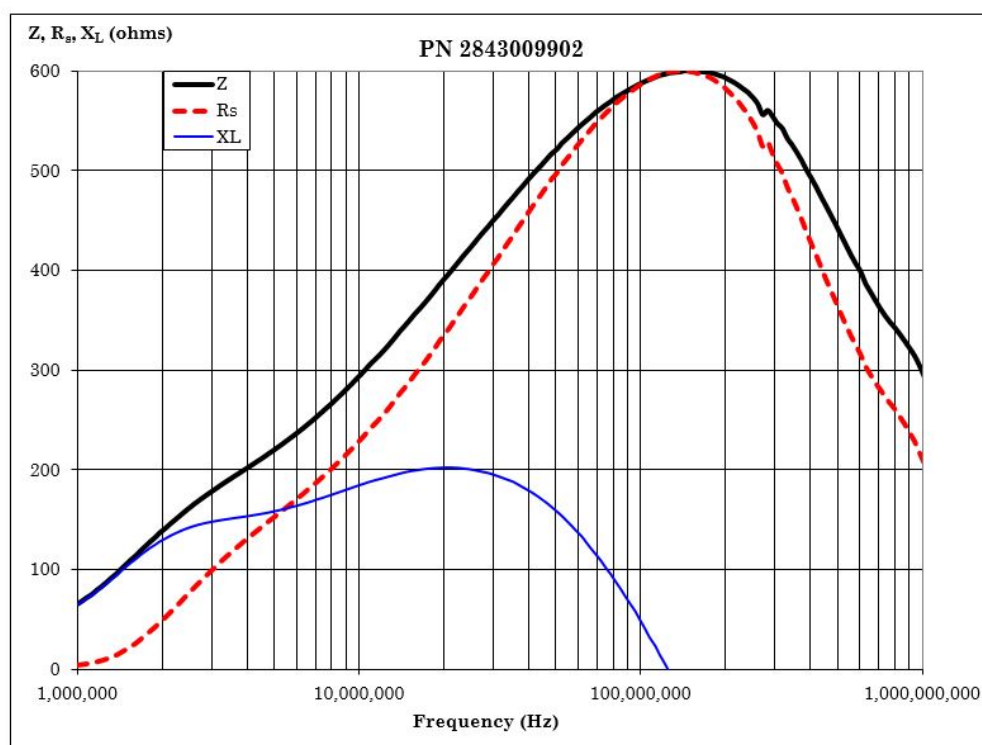

### [CSV Download](#)

Fair-Rite Products Corp. • One Commercial Row, Wallkill, New York 12589-0288  
 888-324-7748 • 845-895-2055 • Fax: 845-895-2629 • ferrites@fair-rite.com • www.fair-rite.com