

# Multi-Aperture cores (2815002702\*)

Part Number: 2815002702

15 MULTI-APERTURE CORE

Explanation of Part Numbers:

- Digits 1 & 2 = Product Class
- Digits 3 & 4 = Material Grade
- Last digit 2 = Burnished

**Multi-aperture cores are used in suppression applications and in balun (balance-unbalance) and other broadband transformers. They are also employed in airbag designs to prevent accidental activation.**

All multi-aperture cores are supplied burnished.

Our “Multi-Aperture Core Kit” (part number 0199000036) is available for prototype evaluation.

**For any multi-aperture requirement not listed here, feel free to contact our customer service group for availability and pricing.**

Weight: 0.3 (g)

Dim	mm	mm tol	nominal inch	inch misc.
A	7	±0.25	0.276	—
B	3.1	±0.25	0.122	—
C	4.2	-0.25	0.16	—
E	2.9	±0.10	0.114	—
H	1.7	+0.20	0.071	—

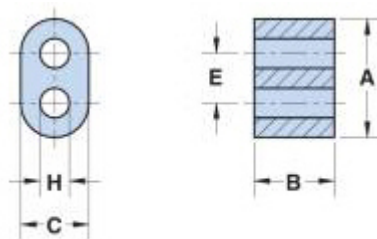


Figure 1

### Chart Legend


+ Test frequency

Typical Impedance ( $\Omega$ )	
25 MHz	32
100 MHz <sup>+</sup>	46

Multi-aperture cores in 73 and 43 materials are controlled for impedance only. The 61 NiZn material is controlled for both impedance and  $A_L$  value. The high frequency 67 material is controlled for  $A_L$  value. Minimum impedance values are specified for the + marked frequencies. The minimum impedance is typically the listed impedance less 20%.

Multi-aperture cores in 73 and 43 material are measured for impedance on the E4990A Impedance Analyzer. The 15, 20, 61 and 67 multi-aperture cores are tested on the E4991A / HP4291B Impedance Analyzer. All impedance measurements are performed with a single turn to both holes, using the shortest practical wire length.

The 61 and 67 material multi-hole beads are tested for  $A_L$  value. The test frequency is 10 kHz at < 10 gauss. The test winding is five turns wound through both holes.

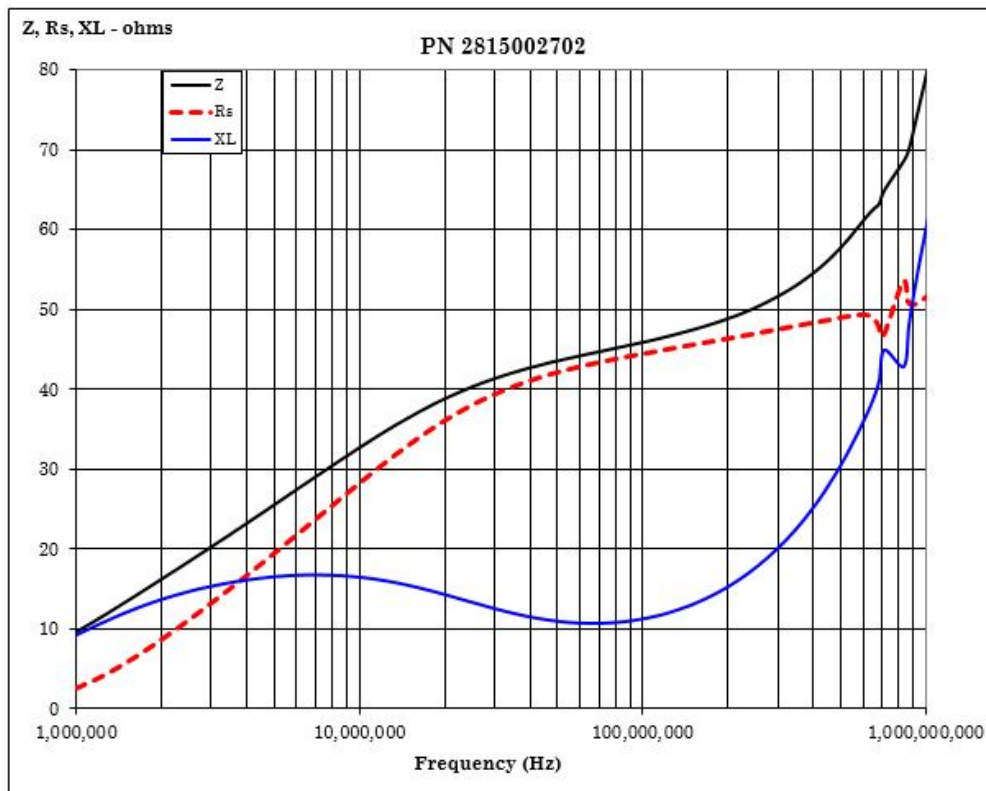

[CSV Download](#)

Fair-Rite Products Corp. • One Commercial Row, Wallkill, New York 12589-0288

888-324-7748 • 845-895-2055 • Fax: 845-895-2629 • ferrites@fair-rite.com • www.fair-rite.com