

Part Number: 2743012201

43 BEAD ON LEAD

Explanation of Part Numbers:

- Digits 1 & 2 = Product Class
- Digits 3 & 4 = Material Grade
- Last digit 1 = Bulk Packed 2 = Taped and Reeled

Ferrite suppression beads are supplied assembled on tinned copper wire for automated circuit board assembly.

- Wires are oxygen free high conductivity copper with 100% matte tin plating over a nickel undercoating. The resistance of the wire is 3.5 mOhm for the 22 AWG and 2.2 mOhm for the 20 AWG wire.

[Recommended Soldering Profile](#)

Packaging Options:

- Beads-on-leads can be supplied bulk packed. The last digit of bulk packed parts is a "1". Parts with a "2" as the last digit of the part number are supplied taped and reeled per IEC 60286-1 and EIA RS-296-F standards. Taped and reeled parts are supplied 4500 pieces on a 14" reel. Taping details: Component pitch 5 mm. Inside tape spacing 52.5 mm. Tape width 6 mm.
- Our "Bead-on-Lead Suppression Kit" (part number 0199000028) is available for prototype evaluation.

For any bead-on lead requirement not listed here, feel free to contact our customer service group for availability and pricing.

[Catalog Drawing](#)

[3D Model](#)

Weight: 4.5 (g)

Dim	mm	mm tol	nominal inch	inch misc.
A	9.8	±0.30	0.386	—
B	62	±1.50	2.44	—
C	11.4	±0.40	0.449	—
D	0.8	—	0	20 AWG




Chart Legend

+ Test frequency


Typical Impedance (Ω)	
10 MHz	137
25 MHz ⁺	210
100 MHz ⁺	315
250 MHz	330


Beads-on-leads are controlled for impedances only. Minimum impedance values are specified for the + marked frequencies. The minimum impedance is typically the listed impedance less 20%.

Catalog Drawing

The impedance of the 73 & 43 beads-on-leads are measure on the E4990A Impedance Analyzer. The 61 beads-on-leads are tested for impedance on the E4991A / HP4291B Impedance Analyzer.

Typical Impedance (Ω)	
10 MHz	121
25 MHz ⁺	193
100 MHz ⁺	271
250 MHz	253

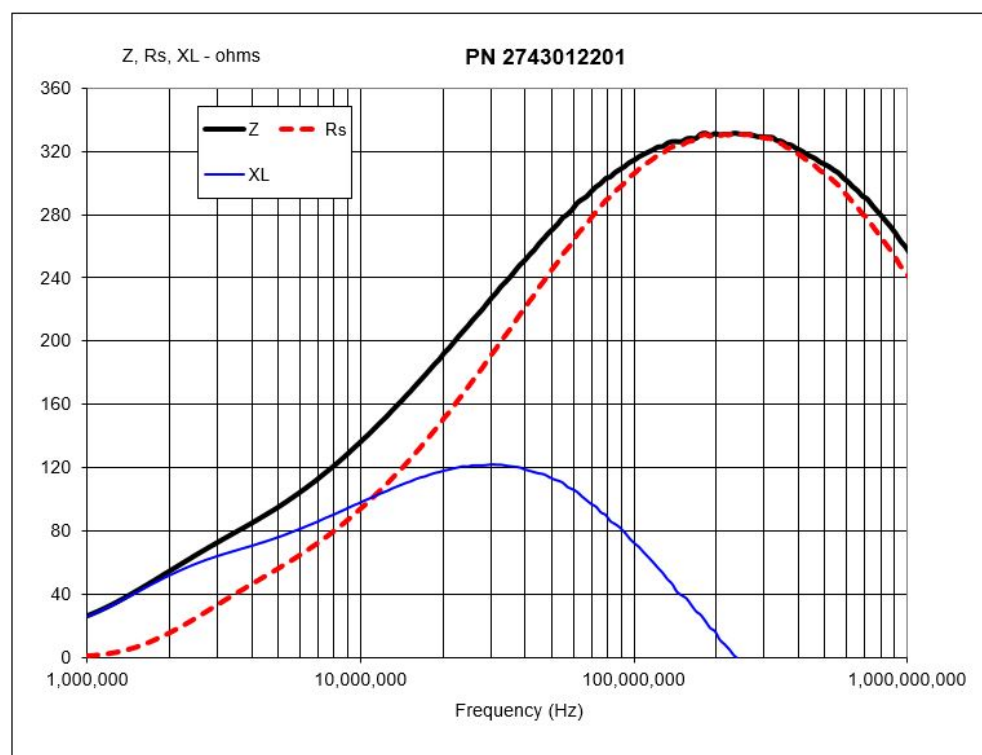

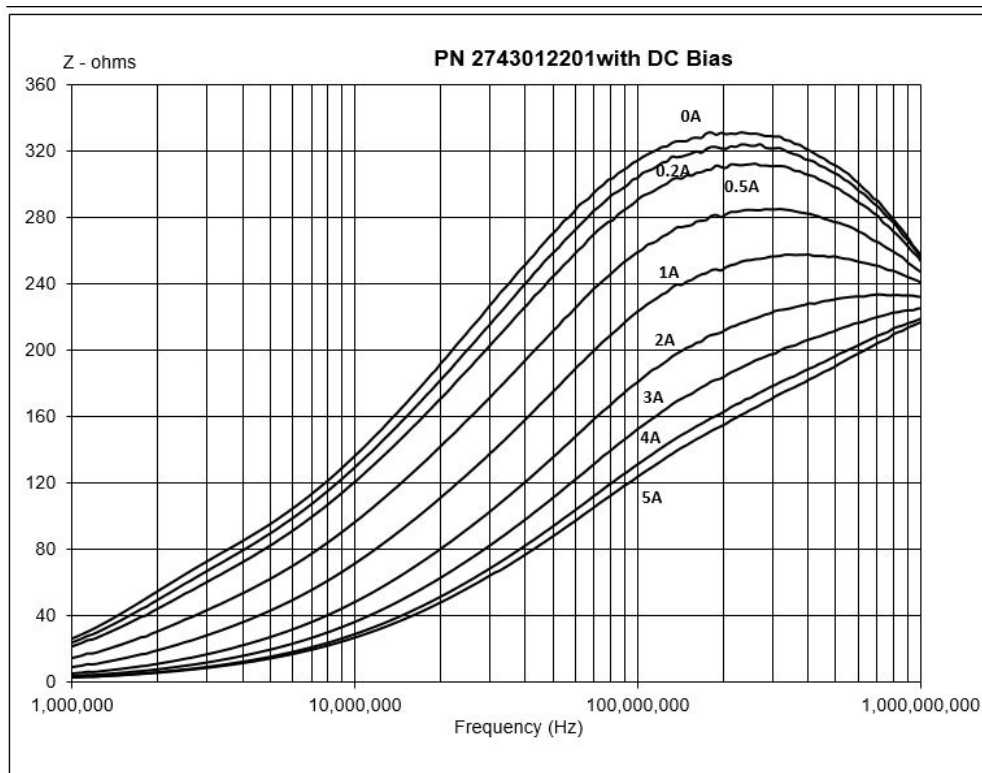

[CSV Download](#)

Fair-Rite Products Corp. • One Commercial Row, Wallkill, New York 12589-0288
888-324-7748 • 845-895-2055 • Fax: 845-895-2629 • ferrites@fair-rite.com • www.fair-rite.com