

Beads-on-Leads (2743001112)



Part Number: 2743001112

43 BEAD ON LEAD

Explanation of Part Numbers:

- Digits 1 & 2 = Product Class
- Digits 3 & 4 = Material Grade
- Last digit 1 = Bulk Packed 2 = Taped and Reeled

Ferrite suppression beads are supplied assembled on tinned copper wire for automated circuit board assembly.

– Wires are oxygen free high conductivity copper with 100% matte tin plating over a nickel undercoating. The resistance of the wire is 3.5 mOhm for the 22 AWG and 2.2 mOhm for the 20 AWG wire.

Recommended Soldering Profile

Packaging Options:

 Beads-on-leads can be supplied bulk packed. The last digit of bulk packed parts is a "1". Parts with a "2" as the last digit of the part number are supplied taped and reeled per IEC 60286-1 and EIA RS-296-F standards. Taped and reeled parts are supplied 4500 pieces on a 14" reel. Taping details: Component pitch 5 mm. Inside tape spacing 52.5 mm. Tape width 6 mm.

– Our "Bead-on-Lead Suppression Kit" (part number 0199000028) is available for prototype evaluation.

For any bead-on lead requirement not listed here, feel free to contact our customer service group for availability and pricing.

Catalog Drawing 3D Model

 $\underline{Weight:} 0.4 (g)$

Dim	mm	mm tol	nominal inch	inch misc.	Reel Infor	Reel Information			
А	3.5	±0.25	0.138	_	Width		Parts 7" Reel	Parts 13" Reel	Parts 14" Reel
В	62	±1.50	2.44	_					
С	4.45	±0.25	0.176		mm				
D	0.65	_	0	22 AWG	6	5	_	_	4500




Chart Legend

+ Test frequency


Typical Impedance (Ω)					
10 MHz	35				
25 MHz^+	50				
100 MHz^+	70				
250 MHz	79				


Beads-on-leads are controlled for impedances only. Minimum impedance values are specified for the + marked frequencies. The minimum impedance is typically the listed impedance less 20%.

Catalog Drawing

The impedance of the 73 & 43 $\mbox{\ensuremath{\mathbb B}}$ beads-on-leads are measure on the E4990A Impedance Analyzer. The 61 beads-on-leads are tested for impedance on the E4991A / HP4291B Impedance Analyzer.

Typical Impendance (Ω)					
10 MHz	31				
25 MHz^+	49				
100 MHz^+	68				
250 MHz	65				

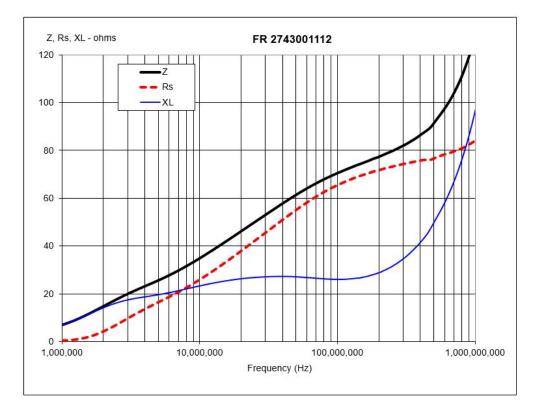

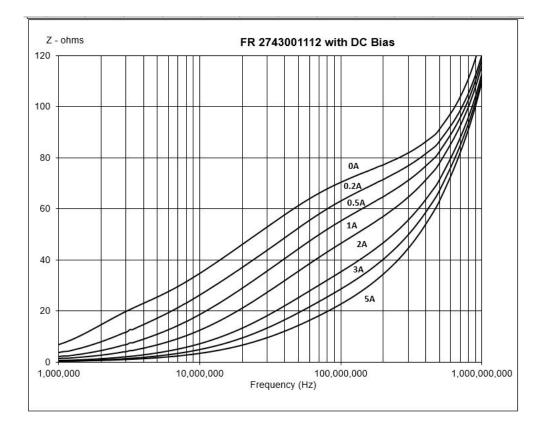

CSV Download

Fair-Rite Products Corp.One Commercial Row, Wallkill, New York 12589-0288888-324-7748845-895-2055Fax: 845-895-2629ferrites@fair-rite.com