

## EMI Suppression Beads (2661000701)



Part Number: 2661000701

61 SHIELD BEAD

**Explanation of Part Numbers:** 

- Digits 1 & 2 = Product Class
- Digits 3 & 4 = Material Grade
- Last digit 1= Not Burnished 2 = Burnished

– The last digit of the Parylene coated part is a "4," which is available upon request. The minimum coating thickness beads is 0.005 mm (0.0002").

Fair-Rite offers a broad selection of ferrite EMI suppression beads with guaranteed minimum impedance specifications.

Our "Shield Bead Kit" (part number 0199000019) contains a selection of these beads.

## **[]**For any EMI suppression bead requirement not listed here, feel free to contact our customer service for availability and pricing.

Catalog Drawing 3D Model

The C dimension, the bead length, can be modified to suit specific applications.

<u>Weight:</u> 0.38 (g)

Dim	mm	mm tol	nominal inch	inch misc.		01 0 23		
А	3.5	±0.20	0.138	_	$\bigcirc$	1		
В	1.3	±0.10	0.051	_	9	в		
С	12.7	±0.35	0.5	_		T		
			•		- A -	-	- C	

## **Chart Legend**

+ Test frequency

• The column "H (Oe)" gives for each bead the calculated dc bias field in oersted for 1 turn and 1 ampere direct current. The actual dc H field in the application is this value of "H" times the actual

NI (ampere-turn) product. For the effect of the dc bias on the impedance of the bead material, see figures 18-23 in the application note []How to choose Ferrite Components for EMI Suppression[].


Typical Impedance ( $\Omega$ )						
100 MHz	134					
$250 \text{ MHz}^+$	174					
500 $\rm MHz^+$	206					
1000 MHz	230					
<b>Electrical Properties</b>						
H(Oe)	2					

Suppression beads are controlled for impedances only. Minimum impedance values are specified for the + marked frequencies. The minimum impedance is typically the listed impedance less 20%.

## **Catalog Drawing**

Single turn impedance tests for 73 and 43 material beads are performed on the E4990A Impedance Analyzer. The 61 material beads are tested on the E4991A / HP4291B Impedance Analyzer. Beads are tested with the shortest practical wire length.

Typical Impendance (Ω)					
100 MHz	120				
$250 \text{ MHz}^+$	158				
500 $\rm MHz^+$	178				
1000 MHz	185				

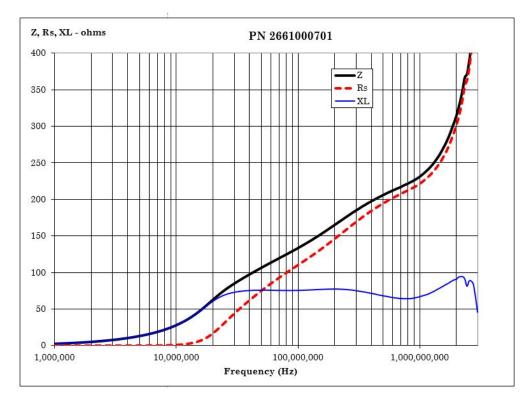

CSV Download

Fair-Rite Products Corp.One Commercial Row, Wallkill, New York 12589-0288888-324-7748845-895-2055Fax: 845-895-2629ferrites@fair-rite.com