

EMI Suppression Beads (2643023002)



Part Number: 2643023002

43 SHIELD BEAD

Explanation of Part Numbers:

- Digits 1 & 2 = Product Class
- Digits 3 & 4 = Material Grade
- Last digit 1= Not Burnished 2 = Burnished

– The last digit of the Parylene coated part is a "4," which is available upon request. The minimum coating thickness beads is 0.005 mm (0.0002").

Fair-Rite offers a broad selection of ferrite EMI suppression beads with guaranteed minimum impedance specifications.

Our "Shield Bead Kit" (part number 0199000019) contains a selection of these beads.

For any EMI suppression bead requirement not listed here, feel free to contact our customer service for availability and pricing.

Catalog Drawing 3D Model

The C dimension, the bead length, can be modified to suit specific applications.

<u>Weight:</u> 4.1 (g)

| Dim | mm | mm tol | nominal inch | inch misc. | | | | | |
|-----|-------|--------|--------------|------------|--------------|---|-------|----|--|
| А | 9.5 | ±0.25 | 0.374 | _ | \bigcirc : | _ | | 22 | |
| В | 4.75 | +0.30 | 0.193 | _ | | 3 | | | |
| С | 19.05 | ±0.70 | 0.75 | _ | | | | | |
| | | | | | - A - | - | - c — | - | |

Chart Legend

+ Test frequency

• The column "H (Oe)" gives for each bead the calculated dc bias field in oersted for 1 turn and 1 ampere direct current. The actual dc H field in the application is this value of "H" times the actual

NI (ampere-turn) product. For the effect of the dc bias on the impedance of the bead material, see figures 18-23 in the application note []How to choose Ferrite Components for EMI Suppression[].


| Typical Impedance (Ω) | | | | | | |
|-----------------------|-----|---|--|--|--|--|
| 10 MHz | 66 | | | | | |
| 25 MHz^+ | 96 | | | | | |
| 100 MHz^+ | 140 | | | | | |
| 250 MHz | 166 | | | | | |
| Electrical Properties | | | | | | |
| H(Oe) | 0.6 | 5 | | | | |

Suppression beads are controlled for impedances only. Minimum impedance values are specified for the + marked frequencies. The minimum impedance is typically the listed impedance less 20%.

Catalog Drawing

Single turn impedance tests for 73 and 43 material® beads are performed on the E4990A Impedance Analyzer. The 61 material beads are tested on the E4991A / HP4291B Impedance Analyzer. Beads are tested with the shortest practical wire length.

| Typical Impendance (Ω) | | | | |
|------------------------|-----|--|--|--|
| 10 MHz | 60 | | | |
| 25 MHz^+ | 100 | | | |
| 100 MHz ⁺ | 145 | | | |
| 250 MHz | 148 | | | |

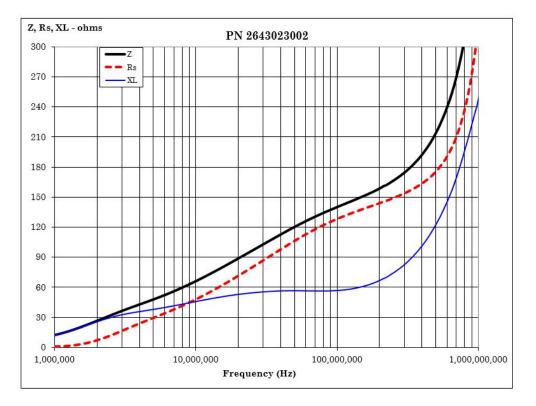

CSV Download

Fair-Rite Products Corp.One Commercial Row, Wallkill, New York 12589-0288888-324-7748845-895-2055Fax: 845-895-2629ferrites@fair-rite.com