

EMI Suppression Beads

(2643023002)

Part Number: 2643023002

43 SHIELD BEAD

Explanation of Part Numbers:

- Digits 1 & 2 = Product Class
- Digits 3 & 4 = Material Grade
- Last digit 1 = Not Burnished 2 = Burnished
- The last digit of the Parylene coated part is a "4," which is available upon request. The minimum coating thickness beads is 0.005 mm (0.0002").

Fair-Rite offers a broad selection of ferrite EMI suppression beads with guaranteed minimum impedance specifications.

Our "Shield Bead Kit" (part number 0199000019) contains a selection of these beads.

For any EMI suppression bead requirement not listed here, feel free to contact our customer service for availability and pricing.

The C dimension, the bead length, can be modified to suit specific applications.

Weight: 4.1 (g)

| Dim | mm | mm tol | nominal inch | inch misc. |
|-----|-------|--------|--------------|------------|
| A | 9.5 | ±0.25 | 0.374 | - |
| B | 4.75 | +0.30 | 0.193 | - |
| C | 19.05 | ±0.70 | 0.75 | - |

| Cable Information | | | |
|-------------------|---------------|------------------|------------------|
| Max Diameter | Max Dimension | Solid Equivalent | Flat Cable Cores |
| 0 | - | 0444173951 | - |

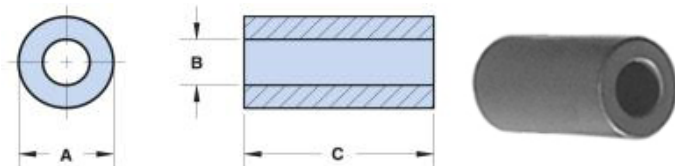


Chart Legend

+ Test frequency

- The column "H (Oe)" gives for each bead the calculated dc bias field in oersted for 1 turn and 1 ampere direct current. The actual dc H field in the application is this value of "H" times the actual NI (ampere-turn) product. For the effect of the dc bias on the impedance of the bead material, see figures 18-23 in the application note [How to choose Ferrite Components for EMI Suppression].


| Typical Impedance (Ω) | |
|--------------------------------|-----|
| 10 MHz | 66 |
| 25 MHz ⁺ | 96 |
| 100 MHz ⁺ | 140 |
| 250 MHz | 166 |

| Electrical Properties | |
|-----------------------|-----|
| H(Oe) | 0.6 |

Suppression beads are controlled for impedances only. Minimum impedance values are specified for the + marked frequencies. The minimum impedance is typically the listed impedance less 20%.

Single turn impedance tests for 73 and 43 material® beads are performed on the E4990A Impedance Analyzer. The 61 material beads are tested on the E4991A / HP4291B Impedance Analyzer. Beads are tested with the shortest practical wire length.

| Typical Impedance (Ω) | |
|--------------------------------|-----|
| 10 MHz | 60 |
| 25 MHz ⁺ | 100 |
| 100 MHz ⁺ | 145 |
| 250 MHz | 148 |

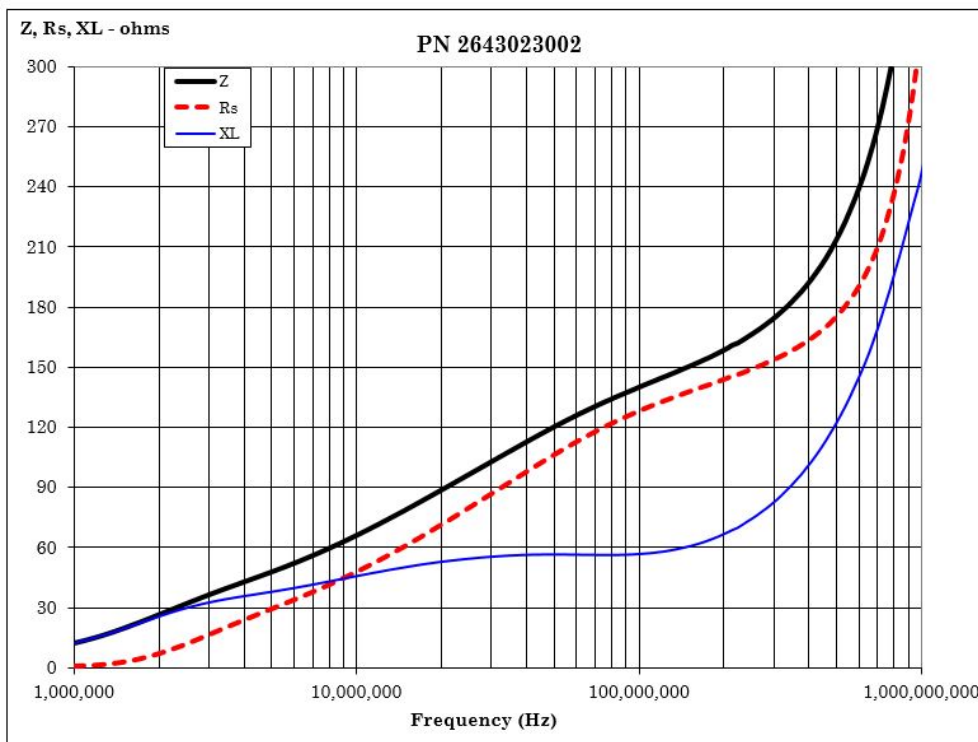

[CSV Download](#)

Fair-Rite Products Corp. • One Commercial Row, Wallkill, New York 12589-0288
888-324-7748 • 845-895-2055 • Fax: 845-895-2629 • ferrites@fair-rite.com • www.fair-rite.com