

EMI Suppression Beads (2643375002)



Part Number: 2643375002

43 SHIELD BEAD

Explanation of Part Numbers:

- Digits 1 & 2 = Product Class
- Digits 3 & 4 = Material Grade
- Last digit 1= Not Burnished 2 = Burnished

– The last digit of the Parylene coated part is a "4," which is available upon request. The minimum coating thickness beads is 0.005 mm (0.0002").

Fair-Rite offers a broad selection of ferrite EMI suppression beads with guaranteed minimum impedance specifications.

Our "Shield Bead Kit" (part number 0199000019) contains a selection of these beads.

For any EMI suppression bead requirement not listed here, feel free to contact our customer service for availability and pricing.

Catalog Drawing 3D Model

The C dimension, the bead length, can be modified to suit specific applications.

<u>Weight:</u> 3.1 (g)

Dim	mm	mm tol	nominal inch	inch misc.		21		
А	9.5	±0.25	0.374	_	\bigcirc	1	///////////////////////////////////////	
В	4.5	+0.75	0.192	_	9	в		
С	14.5	±0.60	0.571	_		Ţ		
-					- A -			

Chart Legend

+ Test frequency

• The column "H (Oe)" gives for each bead the calculated dc bias field in oersted for 1 turn and 1 ampere direct current. The actual dc H field in the application is this value of "H" times the actual

NI (ampere-turn) product. For the effect of the dc bias on the impedance of the bead material, see figures 18-23 in the application note []How to choose Ferrite Components for EMI Suppression[].


Typical Impedance (Ω)						
10 MHz	52					
25 MHz^+	76					
100 MHz^+	110					
250 MHz	131					
Electrical Properties						
H(Oe)	0.6	5				

Suppression beads are controlled for impedances only. Minimum impedance values are specified for the + marked frequencies. The minimum impedance is typically the listed impedance less 20%.

Catalog Drawing

Single turn impedance tests for 73 and 43 material® beads are performed on the E4990A Impedance Analyzer. The 61 material beads are tested on the E4991A / HP4291B Impedance Analyzer. Beads are tested with the shortest practical wire length.

Typical Impendance (Ω)					
10 MHz	47				
25 MHz^+	78				
100 MHz ⁺	115				
250 MHz	119				

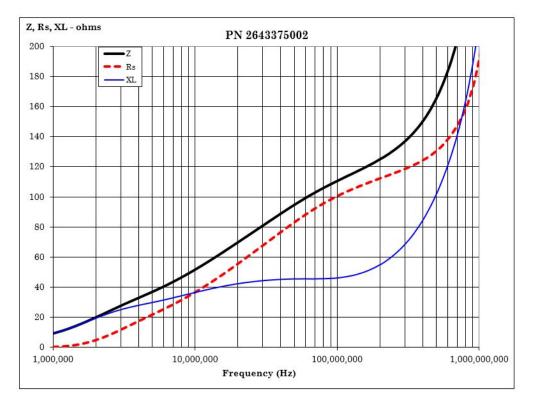

CSV Download

Fair-Rite Products Corp.One Commercial Row, Wallkill, New York 12589-0288888-324-7748845-895-2055Fax: 845-895-2629ferrites@fair-rite.com