

# EMI Suppression Beads

## (2615000102)

Part Number: 2615000102

15 SHIELD BEAD

### Explanation of Part Numbers:

- Digits 1 & 2 = Product Class
- Digits 3 & 4 = Material Grade
- Last digit 1 = Not Burnished 2 = Burnished
- The last digit of the Parylene coated part is a "4," which is available upon request. The minimum coating thickness beads is 0.005 mm (0.0002").

Fair-Rite offers a broad selection of ferrite EMI suppression beads with guaranteed minimum impedance specifications.

Our "Shield Bead Kit" (part number 0199000019) contains a selection of these beads.

**For any EMI suppression bead requirement not listed here, feel free to contact our customer service for availability and pricing.**

[Catalog Drawing](#)

[3D Model](#)

The C dimension, the bead length, can be modified to suit specific applications.

Weight: 0.1 (g)

Dim	mm	mm tol	nominal inch	inch misc.
A	3.5	±0.20	0.138	—
B	1.3	±0.10	0.051	—
C	3.25	±0.25	0.128	—



### Chart Legend

+ Test frequency

- The column "H (Oe)" gives for each bead the calculated dc bias field in oersted for 1 turn and 1 ampere direct current. The actual dc H field in the application is this value of "H" times the actual

NI (ampere-turn) product. For the effect of the dc bias on the impedance of the bead material, see figures 18-23 in the application note "How to choose Ferrite Components for EMI Suppression".


Typical Impedance ( $\Omega$ )	
10 MHz	23
25 MHz <sup>+</sup>	29
100 MHz <sup>+</sup>	34
250 MHz	39

Electrical Properties	
H(Oe)	2

Suppression beads are controlled for impedances only. Minimum impedance values are specified for the + marked frequencies. The minimum impedance is typically the listed impedance less 20%.

Single turn impedance tests for 73 and 43 material beads are performed on the E4990A Impedance Analyzer. The 15, 20 and 61 material beads are tested on the E4991A / HP4291B Impedance Analyzer. Beads are tested with the shortest practical wire length.

Typical Impedance ( $\Omega$ )	
10 MHz	23
25 MHz <sup>+</sup>	29
100 MHz <sup>+</sup>	34
250 MHz	39

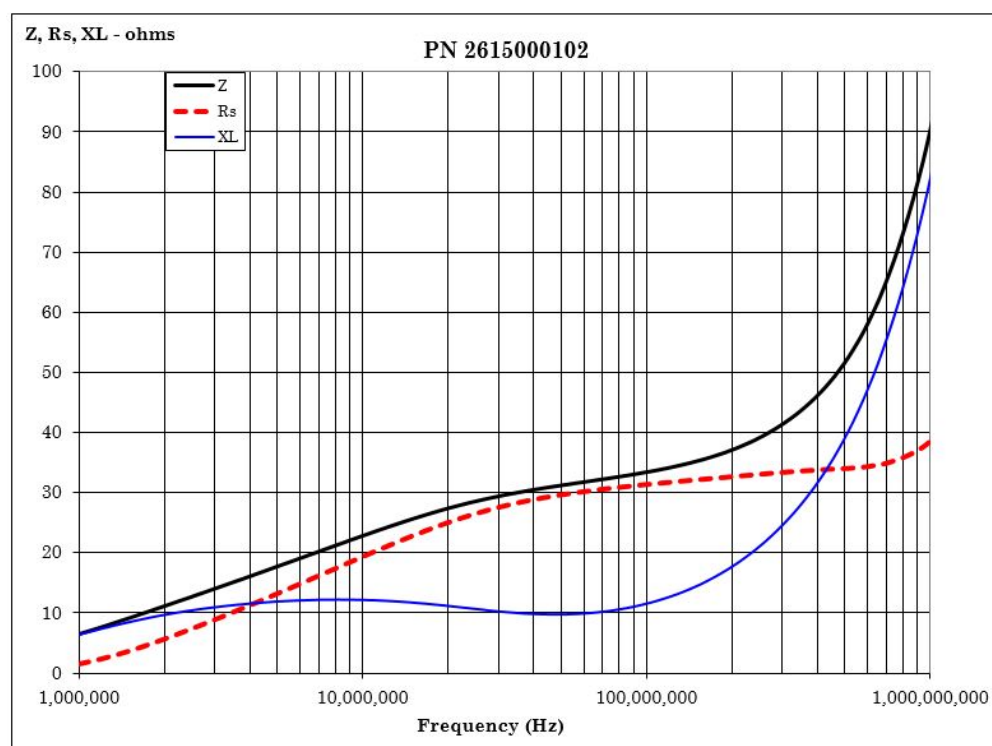

[CSV Download](#)

