

# EMI Suppression Beads (2643000101)



Part Number: 2643000101

43 SHIELD BEAD

#### **Explanation of Part Numbers:**

- Digits 1 & 2 = Product Class
- Digits 3 & 4 = Material Grade
- Last digit 1= Not Burnished 2 = Burnished
- The last digit of the Parylene coated part is a "4," which is available upon request. The minimum coating thickness beads is 0.005 mm (0.0002).

Fair-Rite offers a broad selection of ferrite EMI suppression beads with guaranteed minimum impedance specifications.

Our "Shield Bead Kit" (part number 0199000019) contains a selection of these beads.

For any EMI suppression bead requirement not listed here, feel free to contact our customer service for availability and pricing.

# Catalog Drawing 3D Model

The C dimension, the bead length, can be modified to suit specific applications.

#### <u>Weight:</u> 0.1 (g)

Dim	mm	mm tol	nominal inch	inch misc.	72 (-2	-		
A	3.5	±0.20	0.138	_		1		
В	1.3	±0.10	0.051	_		В	<del>,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,</del>	
С	3.25	±0.25	0.128	_	_	Ī		
			•		- A -		- C -	

#### **Chart Legend**

- + Test frequency
- The column "H (Oe)" gives for each bead the calculated dc bias field in oersted for 1 turn and 1 ampere direct current. The actual dc H field in the application is this value of "H" times the actual

NI (ampere-turn) product. For the effect of the dc bias on the impedance of the bead material, see figures 18-23 in the application note ☐How to choose Ferrite Components for EMI Suppression☐.


Typical Impedance ( $\Omega$					
10 MHz	18				
25 MHz <sup>+</sup>		27			
100 MHz <sup>+</sup>		47			
250 MHz	61				
Electrical Properties					
H(Oe)	2				

Suppression beads are controlled for impedances only. Minimum impedance values are specified for the + marked frequencies. The minimum impedance is typically the listed impedance less 20%.

### **Catalog Drawing**

Single turn impedance tests for 73 and 43 material beads are performed on the E4990A Impedance Analyzer. The 61 material beads are tested on the E4991A / HP4291B Impedance Analyzer. Beads are tested with the shortest practical wire length.

Typical Impenda	Typical Impendance $(Ω)$				
10 MHz	17				
25 MHz <sup>+</sup>	26				
100 MHz <sup>+</sup>	40				
250 MHz	56				

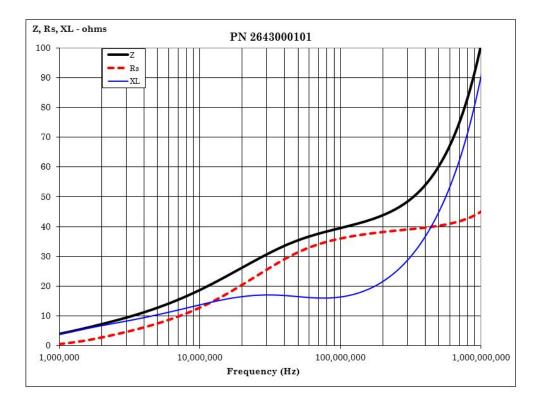

## **CSV** Download

Fair-Rite Products Corp. • One Commercial Row, Wallkill, New York 12589-0288 888-324-7748 • 845-895-2055 • Fax: 845-895-2629 • ferrites@fair-rite.com • www.fair-rite.com