

EMI Suppression Beads (2673000801)



Part Number: 2673000801

73 SHIELD BEAD

Explanation of Part Numbers:

- Digits 1 & 2 = Product Class
- Digits 3 & 4 = Material Grade
- Last digit 1= Not Burnished 2 = Burnished
- The last digit of the Parylene coated part is a "4," which is available upon request. The minimum coating thickness beads is 0.005 mm (0.0002).

Fair-Rite offers a broad selection of ferrite EMI suppression beads with guaranteed minimum impedance specifications.

Our "Shield Bead Kit" (part number 0199000019) contains a selection of these beads.

For any EMI suppression bead requirement not listed here, feel free to contact our customer service for availability and pricing.

Catalog Drawing 3D Model

The C dimension, the bead length, can be modified to suit specific applications.

Weight: 1.4 (g)

Dim	mm	mm tol	nominal inch	inch misc.	721	19		
A	7.5	±0.25	0.295	_		1		
В	2.25	+0.25	0.094	ı		В	· · · · · · · · · · · · · · · · · · ·	
С	7.55	±0.25	0.297	_		T		
	•		-		- A -		- C -	

Chart Legend

- + Test frequency
- The column "H (Oe)" gives for each bead the calculated dc bias field in oersted for 1 turn and 1 ampere direct current. The actual dc H field in the application is this value of "H" times the actual

NI (ampere-turn) product. For the effect of the dc bias on the impedance of the bead material, see figures 18-23 in the application note []How to choose Ferrite Components for EMI Suppression[].


Typical Impedance (Ω					
1 MHz	3	7			
5 MHz	6	7			
10 MHz ⁺	6	3			
25 MHz ⁺	4	9			
Electrical Properties					
H(Oe)	1				

Suppression beads are controlled for impedances only. Minimum impedance values are specified for the + marked frequencies. The minimum impedance is typically the listed impedance less 20%.

Catalog Drawing

Single turn impedance tests for 73 and 43 material beads are performed on the E4990A Impedance Analyzer. The 61 material beads are tested on the E4991A / HP4291B Impedance Analyzer. Beads are tested with the shortest practical wire length.

-						
Typical Impen	Impendance (Ω)					
1 MHz	23					
5 MHz	55.5					
10 MHz ⁺	48					
25 MHz ⁺	45					

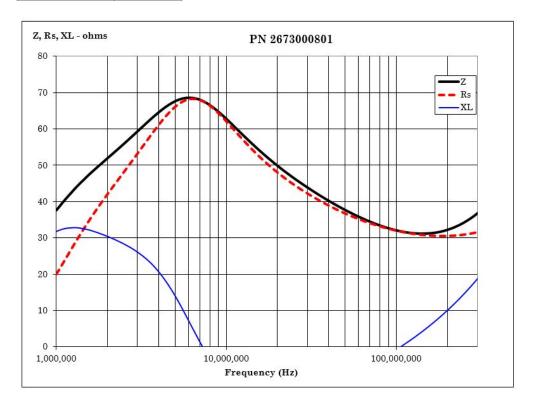

CSV Download

Fair-Rite Products Corp. • One Commercial Row, Wallkill, New York 12589-0288 888-324-7748 • 845-895-2055 • Fax: 845-895-2629 • ferrites@fair-rite.com • www.fair-rite.com