

# EMI Suppression Beads (2673000301)



Part Number: 2673000301

73 SHIELD BEAD

#### **Explanation of Part Numbers:**

- Digits 1 & 2 = Product Class
- Digits 3 & 4 = Material Grade
- Last digit 1= Not Burnished 2 = Burnished
- The last digit of the Parylene coated part is a "4," which is available upon request. The minimum coating thickness beads is 0.005 mm (0.0002).

Fair-Rite offers a broad selection of ferrite EMI suppression beads with guaranteed minimum impedance specifications.

Our "Shield Bead Kit" (part number 0199000019) contains a selection of these beads.

For any EMI suppression bead requirement not listed here, feel free to contact our customer service for availability and pricing.


## Catalog Drawing 3D Model

The C dimension, the bead length, can be modified to suit specific applications.

Weight: 0.24 (g)

Dim	mm	mm tol	nominal inch	inch misc.
A	3.5	±0.20	0.138	_
В	1.3	±0.10	0.051	_
С	6	±0.25	0.236	_







#### **Chart Legend**

- + Test frequency
- The column "H (Oe)" gives for each bead the calculated dc bias field in oersted for 1 turn and 1 ampere direct current. The actual dc H field in the application is this value of "H" times the actual

NI (ampere-turn) product. For the effect of the dc bias on the impedance of the bead material, see figures 18-23 in the application note ☐How to choose Ferrite Components for EMI Suppression☐.


Typical Impedance (Ω				
1 MHz	28			
5 MHz	64			
10 MHz <sup>+</sup>	79			
25 MHz <sup>+</sup>	68			
Electrical Properties				
H(Oe)	2			

Suppression beads are controlled for impedances only. Minimum impedance values are specified for the + marked frequencies. The minimum impedance is typically the listed impedance less 20%.

### **Catalog Drawing**

Single turn impedance tests for 73 and 43 material beads are performed on the E4990A Impedance Analyzer. The 61 material beads are tested on the E4991A / HP4291B Impedance Analyzer. Beads are tested with the shortest practical wire length.

Typical Impen	ypical Impendance ( $\Omega$ )				
1 MHz	15.5				
5 MHz	37.5				
10 MHz <sup>+</sup>	57				
25 MHz <sup>+</sup>	63				

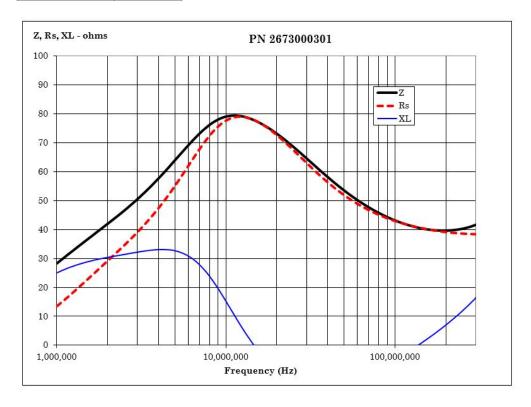

#### **CSV** Download

Fair-Rite Products Corp. • One Commercial Row, Wallkill, New York 12589-0288
888-324-7748 • 845-895-2055 • Fax: 845-895-2629 • ferrites@fair-rite.com • www.fair-rite.com