

EMI Suppression Beads

(2673004701)

Part Number: 2673004701

73 SHIELD BEAD

Explanation of Part Numbers:

- Digits 1 & 2 = Product Class
- Digits 3 & 4 = Material Grade
- Last digit 1= Not Burnished 2 = Burnished
- The last digit of the Parylene coated part is a "4," which is available upon request. The minimum coating thickness beads is 0.005 mm (0.0002").

Fair-Rite offers a broad selection of ferrite EMI suppression beads with guaranteed minimum impedance specifications.

Our "Shield Bead Kit" (part number 0199000019) contains a selection of these beads.

For any EMI suppression bead requirement not listed here, feel free to contact our customer service for availability and pricing.

The C dimension, the bead length, can be modified to suit specific applications.

Weight: 0.01 (g)

| Dim | mm | mm tol | nominal inch | inch misc. |
|-----|------|--------|--------------|------------|
| A | 1.45 | -0.15 | 0.054 | - |
| B | 0.7 | +0.10 | 0.030 | - |
| C | 2.3 | ±0.15 | 0.091 | - |

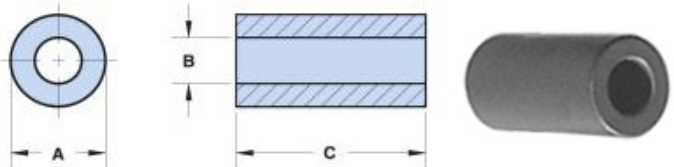


Chart Legend

+ Test frequency

• The column "H (Oe)" gives for each bead the calculated dc bias field in oersted for 1 turn and 1 ampere direct current. The actual dc H field in the application is this value of "H" times the actual NI (ampere-turn) product. For the effect of the dc bias on the impedance of the bead material, see figures 18-23 in the application note [How to choose Ferrite Components for EMI Suppression](#).


| Typical Impedance (Ω) | |
|--------------------------------|-----|
| 1 MHz | 3.8 |
| 5 MHz | 9.2 |
| 10 MHz ⁺ | 13 |
| 25 MHz ⁺ | 18 |

| Electrical Properties | |
|-----------------------|---|
| H(Oe) | 4 |

Suppression beads are controlled for impedances only. Minimum impedance values are specified for the + marked frequencies. The minimum impedance is typically the listed impedance less 20%.

Single turn impedance tests for 73 and 43 material beads are performed on the E4990A Impedance Analyzer. The 61 material beads are tested on the E4991A / HP4291B Impedance Analyzer. Beads are tested with the shortest practical wire length.

| Typical Impedance (Ω) | |
|--------------------------------|------|
| 1 MHz | 3.1 |
| 5 MHz | 7.6 |
| 10 MHz ⁺ | 12.5 |
| 25 MHz ⁺ | 17 |

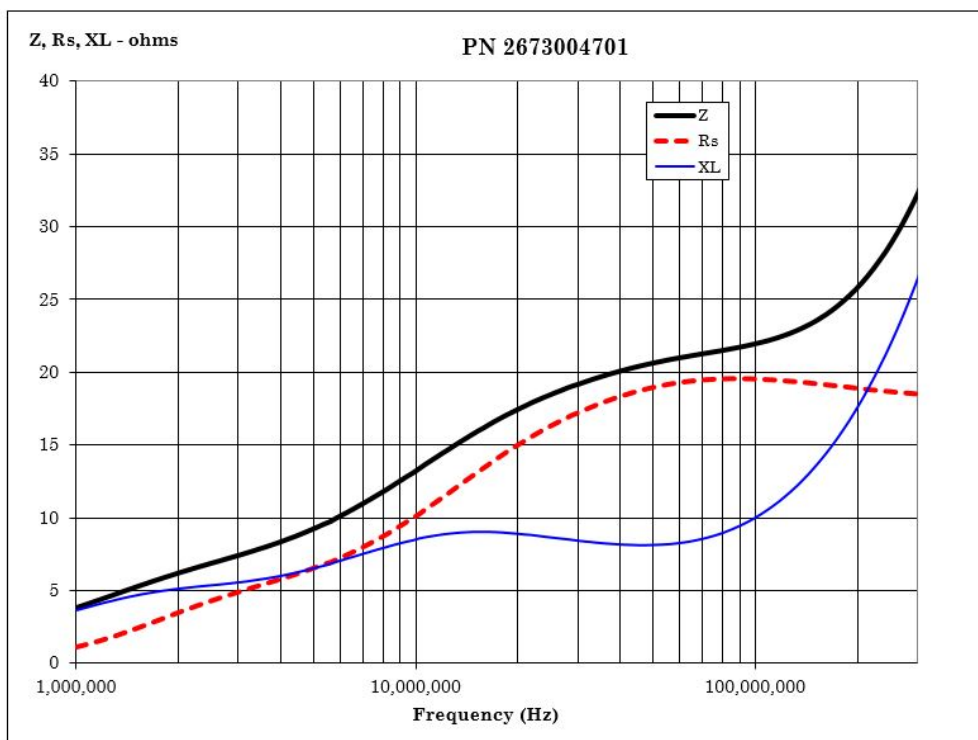

[CSV Download](#)