

Part Number: 9478117002

78 E CORE SET

The E core geometry offers an economical design approach for inductive applications in a variety of power designs.

E cores can be supplied with the center post gapped to a mechanical dimension or an A_L value.

[Catalog Drawing](#)

[3D Model](#)

Weight indicated is per pair or set.

Weight: 410 (g)

Dim	mm	mm tol	nominal inch	inch misc.
A	65.2	±1.30	2.567	—
B	32.5	±0.30	1.28	—
C	26.9	±0.35	1.059	—
D	22.55	±0.35	0.888	—
E	44.2	min	1.741	min
F	19.65	±0.35	0.774	—

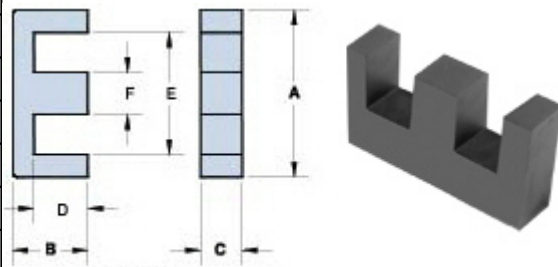


Chart Legend

$\Sigma l/A$: Core Constant, l_e : Effective Path Length, A_e : Effective Cross-Sectional Area, V_e : Effective Core Volume

A_L : Inductance Factor 

Explanation of Part Numbers: Digits 1 & 2 = product class and 3 & 4 = material grade.

Electrical Properties	
A_L (nH)	7600 ±25%
A_e (cm ²)	5.31
$\Sigma l/A$ (cm ⁻¹)	2.8
l_e (cm)	14.7

Electrical Properties	
$V_e(\text{cm}^3)$	78.1
$A_{\text{min}}(\text{cm}^2)$	5.29

Fair-Rite Products Corp. • One Commercial Row, Wallkill, New York 12589-0288
888-324-7748 • 845-895-2055 • Fax: 845-895-2629 • ferrites@fair-rite.com • www.fair-rite.com