

Part Number: 9498110002

98 E CORE SET

The E core geometry offers an economical design approach for inductive applications in a variety of power designs.

E cores can be supplied with the center post gapped to a mechanical dimension or an A_L value.

[Catalog Drawing](#)

[3D Model](#)

Weight indicated is per pair or set.

Weight: 32 (g)

Dim	mm	mm tol	nominal inch	inch misc.
A	32.1	± 0.60	1.264	—
B	16.1	± 0.30	0.634	—
C	9.15	± 0.35	0.36	—
D	11.5	± 0.30	0.453	—
E	22.7	min	0.894	min
F	9.2	± 0.30	0.362	—

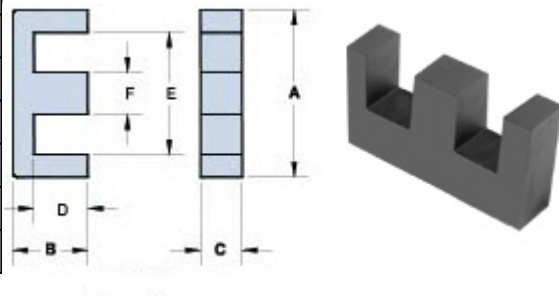


Chart Legend

$\Sigma l/A$: Core Constant, l_e : Effective Path Length, A_e : Effective Cross-Sectional Area, V_e : Effective Core Volume

A_L : Inductance Factor 

Explanation of Part Numbers: Digits 1 & 2 = product class and 3 & 4 = material grade.

Electrical Properties	
A_L (nH)	2800 $\pm 25\%$
A_e (cm ²)	0.821
$\Sigma l/A$ (cm ⁻¹)	9.07
l_e (cm)	7.45

Electrical Properties	
$V_e(\text{cm}^3)$	6.11
$A_{\min}(\text{cm}^2)$	0.79

Fair-Rite Products Corp. • One Commercial Row, Wallkill, New York 12589-0288
888-324-7748 • 845-895-2055 • Fax: 845-895-2629 • ferrites@fair-rite.com • www.fair-rite.com