

Part Number: 9495103002

95 E CORE SET

The E core geometry offers an economical design approach for inductive applications in a variety of power designs.

E cores can be supplied with the center post gapped to a mechanical dimension or an A_L value.

[Catalog Drawing](#)

[3D Model](#)

Weight indicated is per pair or set.

Weight: 4.6 (g)

Dim	mm	mm tol	nominal inch	inch misc.
A	19	±0.40	0.748	—
B	8	±0.30	0.315	—
C	4.8	±0.30	0.189	—
D	5.75	±0.25	0.226	—
E	13.8	min	0.544	min
F	4.5	±0.30	0.177	—

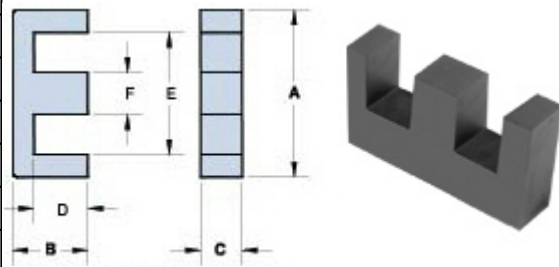


Chart Legend

$\Sigma l/A$: Core Constant, l_e : Effective Path Length, A_e : Effective Cross-Sectional Area, V_e : Effective Core Volume

A_L : Inductance Factor 

Explanation of Part Numbers: Digits 1 & 2 = product class and 3 & 4 = material grade.

Electrical Properties	
A_L (nH)	1400 ±25%
A_e (cm ²)	0.22
$\Sigma l/A$ (cm ⁻¹)	18.1
l_e (cm)	3.99

Electrical Properties	
$V_e(\text{cm}^3)$	0.878
$A_{\text{min}}(\text{cm}^2)$	0.216

Fair-Rite Products Corp. • One Commercial Row, Wallkill, New York 12589-0288
888-324-7748 • 845-895-2055 • Fax: 845-895-2629 • ferrites@fair-rite.com • www.fair-rite.com