

Part Number: 9677001015

77 BOBBIN GROUND

Explanation of Part Numbers:

- Digits 1 & 2 = Product Class
- Digits 3 & 4 = Material Grade
- Last digit 8 = Coated Bobbin

Bobbins are an economical and well-proven core design for many applications where relatively low but stable inductance values are required.

For higher frequency designs, use small bobbins in 43 material.

□

For power applications, bobbins in 77 material are specified for A_L and dc bias limits.

Bobbins in Figures 2-5 can be supplied with a uniform thermo-set plastic coating which can withstand a minimum breakdown of 500Vrms. This coating will change the dimensions a maximum of 0.5 mm (0.020"). The last digit of the thermo-set plastic coated part is an "8".

For any bobbin requirement not listed in the catalog, please contact our customer service group for availability and pricing.

[Catalog Drawing](#)
[3D Model](#)

Weight: 6.7 (g)

Dim	mm	mm tol	nominal inch	inch misc.
A	9.55	-0.15	0.373	—
B	19	±0.70	0.748	—
D	12.7	±0.15	0.5	—
F	4.65	+0.20	0.187	—
G	1	+0.25	0.044	—
H	1.03	+0.10	0.043	—

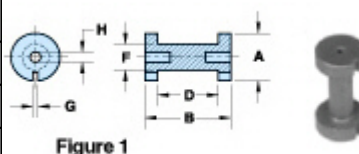



Chart Legend

A_L : Inductance Factor  N_L : Value of dc Ampere-turns, A_w :Winding Area,

N/AWG : Number of Turns/Wire Size for Test Coil

Electrical Properties	
A_L (nH)	$39 \pm 10\%$
A_L min. @ NI (At)	33 - 125
N/AWG	75/24
A_w (cm ²)	0.3

Bobbins are tested for A_L value at 1kHz < 10 gauss.

Fair-Rite Products Corp. • One Commercial Row, Wallkill, New York 12589-0288
888-324-7748 • 845-895-2055 • Fax: 845-895-2629 • ferrites@fair-rite.com • www.fair-rite.com