

Part Number: 9643001015

43 BOBBIN GROUND

Explanation of Part Numbers:

- Digits 1 & 2 = Product Class
- Digits 3 & 4 = Material Grade
- Last digit 8 = Coated Bobbin

Bobbins are an economical and well-proven core design for many applications where relatively low but stable inductance values are required.

For higher frequency designs, use small bobbins in 43 material® .

□

For power applications, bobbins in 77 material are specified for  $A_L$  and dc bias limits.

Bobbins in Figures 2-5 can be supplied with a uniform thermo-set plastic coating which can withstand a minimum breakdown of 500Vrms. This coating will change the dimensions a maximum of 0.5 mm (0.020"). The last digit of the thermo-set plastic coated part is an "8".

**□For any bobbin requirement not listed in the catalog, please contact our customer service group for availability and pricing.**

Weight: 6.7 (g)

Dim	mm	mm tol	nominal inch	inch misc.
A	9.55	-0.15	0.373	-
B	19	±0.70	0.748	-
D	12.7	±0.15	0.5	-
F	4.65	+0.20	0.187	-
G	1	+0.25	0.044	-
H	1.03	+0.10	0.043	-

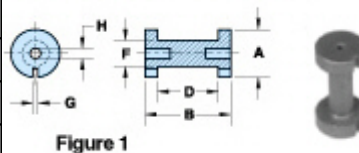


Figure 1

### Chart Legend

$A_L$  : Inductance Factor  ,  $N_I$  : Value of dc Ampere-turns,  $A_w$ :Winding Area,  
N/AWG : Number of Turns/Wire Size for Test Coil

Electrical Properties	
$A_L$ (nH)	38.0 $\pm$ 10%
N/AWG	75/24
$A_w$ (cm <sup>2</sup> )	0.3

Bobbins are tested for  $A_L$  value at 1kHz < 10 gauss.

Fair-Rite Products Corp. • One Commercial Row, Wallkill, New York 12589-0288  
888-324-7748 • 845-895-2055 • Fax: 845-895-2629 • ferrites@fair-rite.com • www.fair-rite.com