

Part Number: 0431164051

## 31 FLAT CABLE CORE ASSEMBLY

### Explanation of Part Numbers:

- Digits 1 & 2 = Product Class
- Digits 3 & 4 = Material Grade


Flat Cable Snap-It™ for use on multi-conductor flat cables to suppress common-mode conducted EMI from 1MHz to hundreds of MHz. These Flat Cable Snap-It™ are available in two ferrite materials, 31 and 43. The polypropylene cases are meeting the RoHS restrictions of hazardous substances and have a flammability rating of UL 94 V-0.

The Expanded Cable and Suppressor Kit (Part number 0199000005) contains several Flat Cable Snap-It™ assemblies.

Weight: 130 (g)

Dim	mm	mm tol	nominal inch	inch misc.
A	80.8	+/- 2.00	3.181	-
B	64.50	/>(2.540")	2.54	-
C	32.3	-	1.272	-
D	7.90	+/- 0.5	0.311	-

Cable Information			
Max Diameter	Max Dimension	Solid Equivalent	Flat Cable Cores
0	64.00 x 1.30	-	-

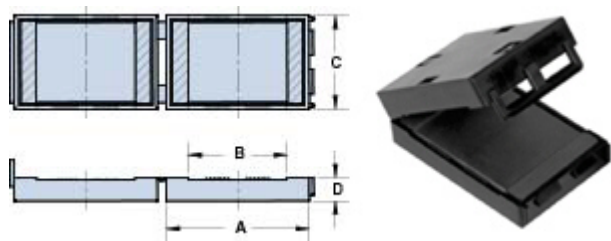

### **Chart Legend**

+ Test frequency

Typical Impedance (Ω)	
1 MHz	14
5 MHz	40


Typical Impedance ( $\Omega$ )	
10 MHz <sup>+</sup>	57
25 MHz <sup>+</sup>	102
100 MHz <sup>+</sup>	260
250 MHz	440


Flat Cable Snap-It™ assemblies are controlled for impedances only. Minimum impedance values are specified for the + marked frequencies. The minimum impedance is typically the listed impedance less 20%.

[Catalog Drawing](#)

Centered, single turn impedance tests on the 31 and 43 material parts are performed on the E4991A/HP4291B Impedance Analyzer. Cores are tested with the shortest practical wire length.

Typical Impedance ( $\Omega$ )	
1 MHz	11
5 MHz	34
10 MHz <sup>+</sup>	52
25 MHz <sup>+</sup>	105
100 MHz <sup>+</sup>	310
250 MHz	440

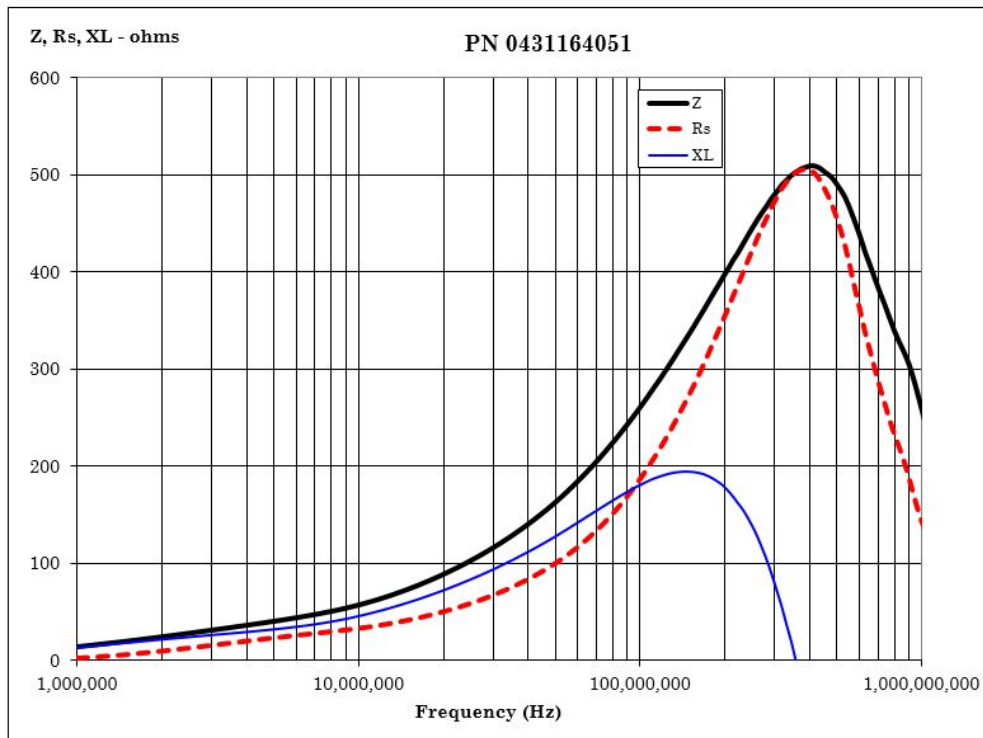

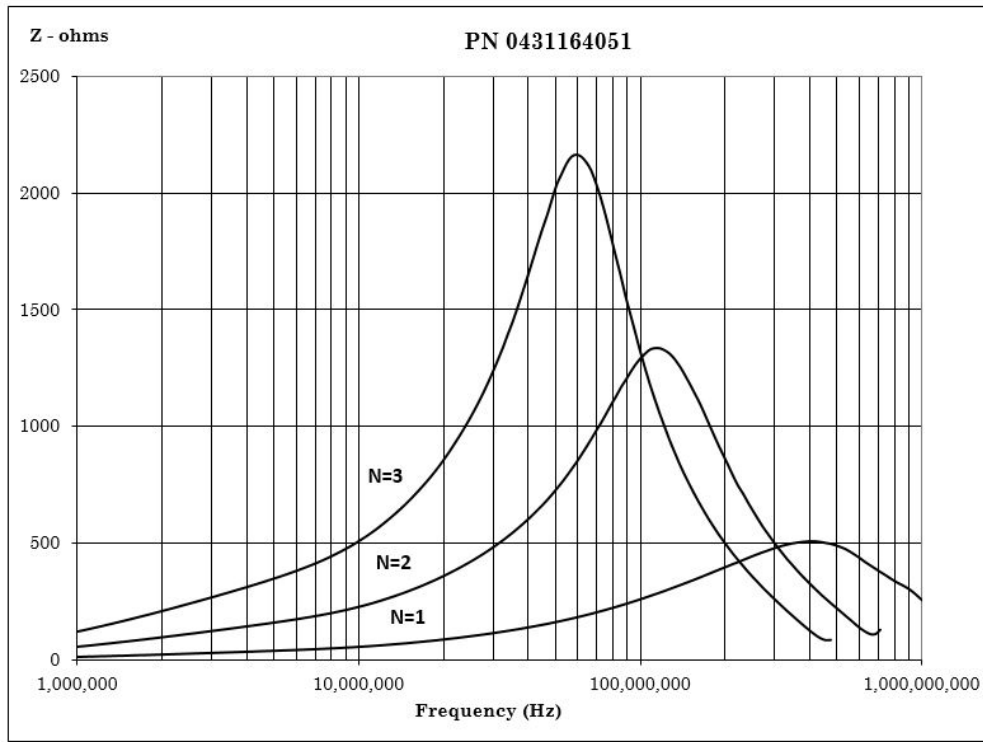

[CSV Download](#)

Fair-Rite Products Corp. • One Commercial Row, Wallkill, New York 12589-0288  
888-324-7748 • 845-895-2055 • Fax: 845-895-2629 • ferrites@fair-rite.com • www.fair-rite.com