

Part Number: 0431184751

31 OVAL CABLE CORE ASSEMBLY

Explanation of Part Numbers:

- Digits 1 & 2 = Product Class
- Digits 3 & 4 = Material Grade

The B dimension is the core inside diameter.

Weight: 65 (g)

Dim	mm	mm tol	nominal inch	inch misc.
A	40.32	mm +/- 1.0	1.59	—
B	19.20	Min	0.75	—
C	43.50	+/- 0.0	1.71	—
D	28.62	+/- 1.0	1.13	—
E	9.20	—	0.36	—
F	3.57	—	0.14	—

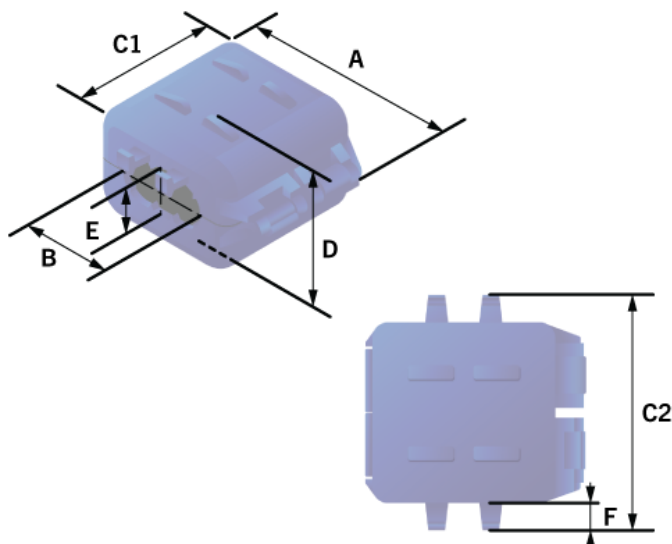


Chart Legend

+ Test frequency

• For solid cable cores, see Round Cable EMI Suppression Cores

Typical Impedance (Ω)	
10 MHz	81
25 MHz	121
100 MHz	203

Round cable snap-it™ assemblies are controlled for impedances only. Minimum impedance values are specified for the + marked frequencies. The minimum impedance is typically the listed impedance less 20%.

Single turn impedance tests for 31, 43 and 46 material cores are performed on the E4991A/HP4291B Impedance Analyzer. The 61 material parts are tested on the E4991A / HP4291B Impedance Analyzer and 75 material parts are tested on the E4990A Impedance Analyzer. Cores are tested with the shortest practical wire length.

Typical Impedance (Ω)	
10 MHz ⁺	81
25 MHz ⁺	121
100 MHz ⁺	203

Fair-Rite Products Corp. • One Commercial Row, Wallkill, New York 12589-0288
 888-324-7748 • 845-895-2055 • Fax: 845-895-2629 • ferrites@fair-rite.com • www.fair-rite.com