

Part Number: 0475184751

75 OVAL CABLE CORE ASSEMBLY


Explanation of Part Numbers:

- Digits 1 & 2 = Product Class
- Digits 3 & 4 = Material Grade

The B dimension is the core inside diameter.

Weight: 65 (g)

Dim	mm	mm tol	nominal inch	inch misc.
A	40.32	1.0 1.59	1.59	
B	19.20		0.75	
C	43.50	1.0 1.71	1.71	
D	28.62	+/- 1.0 1.13	1.13	
E	9.20		0.36	
F	3.57		.14	

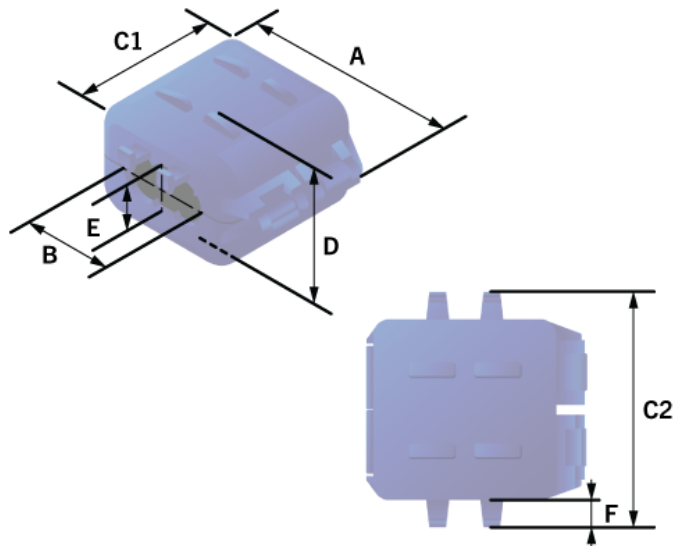

**Chart Legend**

- + Test frequency
- For solid cable cores, see Round Cable EMI Suppression Cores

Typical Impedance (Ω)	
500 kHz	33

Typical Impedance ( $\Omega$ )	
1 MHz	58
5 MHz	40

Round cable snap-it™ assemblies are controlled for impedances only. Minimum impedance values are specified for the + marked frequencies. The minimum impedance is typically the listed impedance less 20%.

Single turn impedance tests for 31, 43 and 46 material cores are performed on the E4991A/HP4291B Impedance Analyzer. The 61 material parts are tested on the E4991A / HP4291B Impedance Analyzer and 75 material parts are tested on the E4990A Impedance Analyzer. Cores are tested with the shortest practical wire length.

Typical Impedance ( $\Omega$ )	
500 kHz	33
1 MHz	58
5 MHz	40

Fair-Rite Products Corp. • One Commercial Row, Wallkill, New York 12589-0288

888-324-7748 • 845-895-2055 • Fax: 845-895-2629 • ferrites@fair-rite.com • www.fair-rite.com