

Part Number: 0461184651

61 OVAL CABLE CORE ASSEMBLY

Explanation of Part Numbers:

- Digits 1 & 2 = Product Class
- Digits 3 & 4 = Material Grade

The B dimension is the core inside diameter.

Weight: (g)

| Dim | mm | mm tol | nominal inch | inch misc. |
|-----|-------|---------|--------------|------------|
| A | 33.40 | +/- 1.0 | 1.31 | |
| B | 15.80 | _ | 0.62 | |
| C | 42.52 | +/- 1.0 | 1.67 | |
| D | 23.85 | +/- 1.0 | 0.94 | |
| E | 7.50 | _ | 0.30 | |
| F | 3.57 | _ | .14 | |

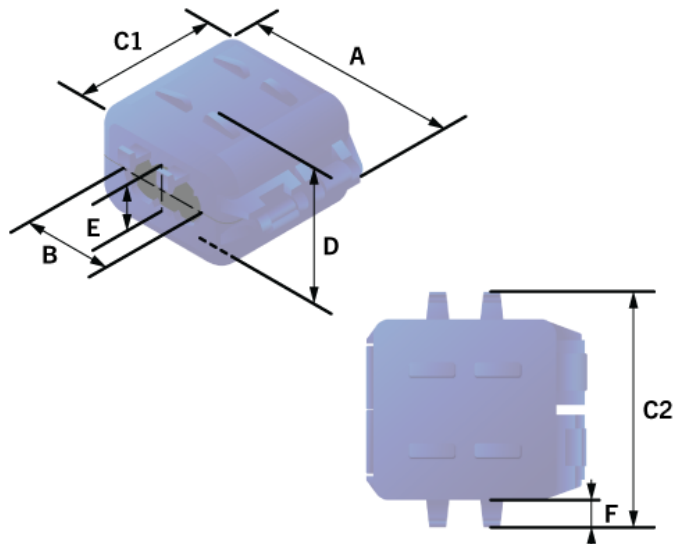


Chart Legend

+ Test frequency

• For solid cable cores, see Round Cable EMI Suppression Cores

Round cable snap-it™ assemblies are controlled for impedances only. Minimum impedance values

are specified for the + marked frequencies. The minimum impedance is typically the listed impedance less 20%.

Single turn impedance tests for 31, 43 and 46 material cores are performed on the E4991A/HP4291B Impedance Analyzer. The 61 material parts are tested on the E4991A / HP4291B Impedance Analyzer and 75 material parts are tested on the E4990A Impedance Analyzer. Cores are tested with the shortest practical wire length.

Fair-Rite Products Corp. • One Commercial Row, Wallkill, New York 12589-0288
888-324-7748 • 845-895-2055 • Fax: 845-895-2629 • ferrites@fair-rite.com • www.fair-rite.com