

Part Number: 0375184751Q

75 OVAL CABLE CORE ASSEMBLY

Fair-Rite® offers our AEC-Q200 parts in both qualified and standard versions. While physically identical the qualified version includes full traceability and validation data required for automotive safety.

Explanation of Part Numbers:

- Digits 1 & 2 = Product Class
- Digits 3 & 4 = Material Grade

The B dimension is the core inside diameter.

Weight: 65 (g)

| Dim | mm | mm tol | nominal inch | inch misc. |
|-----|-------|---------|--------------|------------|
| A | 30.43 | +/- 1.0 | 1.20 | - |
| B | 19.20 | - | 0.75 min | - |
| C | 29.90 | +/- 1.0 | 1.18 | - |
| D | 23.0 | +/- 1.0 | 0.91 | - |
| E | 9.2 | - | 0.36 min | - |

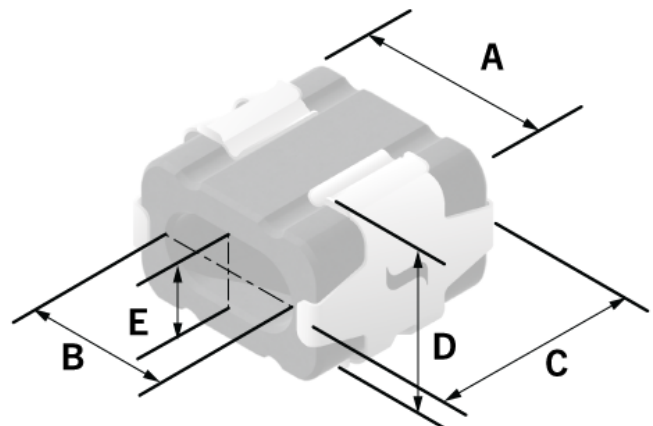


Chart Legend

+ Test frequency

• For solid cable cores, see Round Cable EMI Suppression Cores

| Typical Impedance (Ω) | |
|--------------------------------|---------|
| 500 kHz | 21 Min |
| 1 MHz | 38 Min. |
| 5 MHz | 29 Min |
| Electrical Properties | |
| $A_e(\text{cm}^2)$ | 1.27 |
| $\Sigma l/A(\text{cm}^{-1})$ | 0.0583 |
| $l_e(\text{cm})$ | 7.41 |
| $V_e(\text{cm}^3)$ | 9.41 |

Oval Cable Clip-It assemblies are controlled for impedances only. Minimum impedance values are specified for the + marked frequencies. The minimum impedance is typically the listed impedance less 20%.

Single turn impedance tests for 31, 43 and 46 material cores are performed on the E4991A/HP4291B Impedance Analyzer. The 61 material parts are tested on the E4991A / HP4291B Impedance Analyzer and 75 material parts are tested on the E4990A Impedance Analyzer. Cores are tested with the shortest practical wire length.

| Typical Impedance (Ω) | |
|--------------------------------|----|
| 0.5 MHz ²¹ | 21 |
| 1 MHz ⁺ | 38 |
| 5 MHz ⁺ | 29 |