

Part Number: 9277024002

77 U CORE

Explanation of Part Numbers: Digits 1&2 = product class, 3&4 = material grade.

The U core offers an economical core design with a nearly uniform cross-sectional area. In a power ferrite material they are frequently used in output chokes, power input filters and transformers for switched-mode power supplies and HF fluorescent ballasts.

For any U core requirement not listed in the catalog, please contact our customer service group for availability and pricing.

Weight indicated is per pair or set.

Weight: 35 (g)

Dim	mm	mm tol	nominal inch	inch misc.
A	31.4	±0.60	1.236	—
B	18.5	±0.15	0.729	—
C	10.25	-0.25	0.394	—
D	9.4	Min	0.371	Min
E	12.5	Min	0.493	Min
F	26.6	±0.50	1.047	—

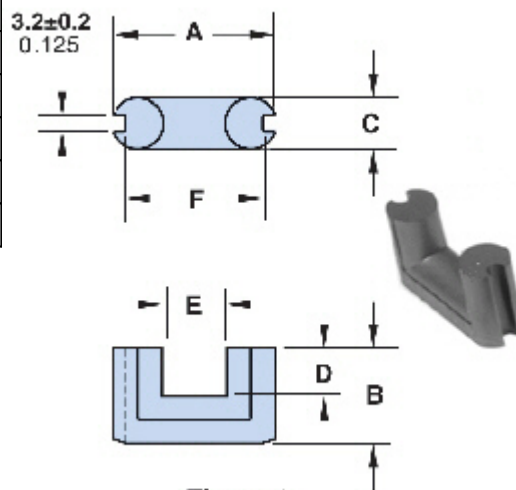



Figure 3

Chart Legend

- An I core, 9377024002, is available for these U cores. See I Core Section of our catalog.
- $\Sigma l/A$: Core Constant, l_e : Effective Path Length, A_e : Effective Cross-Sectional Area, V_e : Effective Core Volume
- A_L : Inductance Factor 

Electrical Properties	
A_L (nH)	1425 Min
A_e (cm ²)	0.83
$\Sigma l/A$ (cm ⁻¹)	11.2
l_e (cm)	9.3
V_e (cm ³)	7.7

A_L value is measured at 1kHz, < 10 gauss.

These U cores have the same minimum cross-sectional area as the listed effective cross-sectional area.

Fair-Rite Products Corp. • One Commercial Row, Wallkill, New York 12589-0288
888-324-7748 • 845-895-2055 • Fax: 845-895-2629 • ferrites@fair-rite.com • www.fair-rite.com