

Part Number: 6295370121

95 RM CORE SET

RM (Rectangular Modulus) cores allow better shielding than E type geometries while also providing easier winding accessibility and better power dissipation than a pot core configuration. Fair-Rite's standard RM cores all have a solid center post and standard height, low profile and alternate materials are available upon request.

RM cores can be supplied with the center post gapped to a mechanical dimension or an A_L value.

[Catalog Drawing](#)
[3D Model](#)

Weight indicated is per pair or set.

Weight: 46 (g)

Dim	mm	mm tol	nominal inch	inch misc.
A	36.75	± 0.75	1.447	—
B	12.25	± 0.15	0.482	—
C	15.85	± 0.25	0.624	—
D	8.55	± 0.20	0.337	—
E	25.45	± 0.55	1.002	—
F	12.6	± 0.20	0.496	—
G	13.4	min	0.528	min
J	29.2	± 0.60	1.15	—

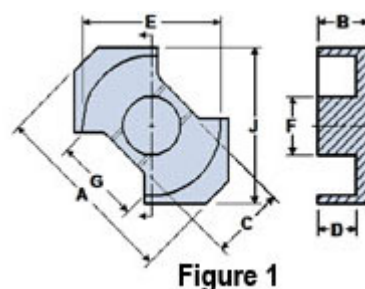



Figure 1

Chart Legend

$\Sigma l/A$: Core Constant, l_e : Effective Path Length, A_e : Effective Cross-Sectional Area, V_e : Effective Core Volume

A_L : Inductance Factor 

Explanation of Part Numbers: Digits 1 & 2 = product class and 3 & 4 = material grade.

Electrical Properties	
A_L (nH)	6360 $\pm 25\%$
A_e (cm ²)	1.41

Electrical Properties	
$\Sigma l/A(\text{cm}^{-1})$	4.3
$l_e(\text{cm})$	6.13
$V_e(\text{cm}^3)$	8.675
$A_{\min}(\text{cm}^2)$	1.247

A_L value is measured at 1 kHz, $B < 10$ gauss.

Fair-Rite Products Corp. • One Commercial Row, Wallkill, New York 12589-0288
888-324-7748 • 845-895-2055 • Fax: 845-895-2629 • ferrites@fair-rite.com • www.fair-rite.com