

Part Number: 5698221421

98 POT CORE SET

Pot cores have found application in all types of inductive devices. The core configuration provides a high degree of self-shielding. It also facilitates gapping to enhance utility for a variety of magnetic designs.

Pot cores can be supplied with the center post gapped to a mechanical dimension or an A_L value.

Weight indicated is per pair or set.

Weight: 12.000 (g)

Dim	mm	mm tol	nominal inch	inch misc.
A	21.6	±0.40	0.85	—
B	6.7	±0.10	0.264	—
C	14.9	±1.60	0.587	—
D	4.7	±0.15	0.185	—
E	18.2	±0.40	0.717	—
F	9.25	±0.15	0.364	—
G	3.7	±0.70	0.146	—
H	4.55	±0.15	0.179	—

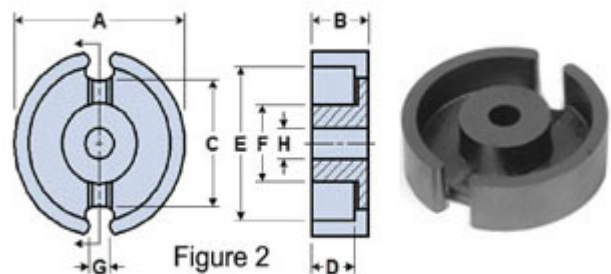



Chart Legend

$\Sigma l/A$: Core Constant, l_e : Effective Path Length, A_e : Effective Cross-Sectional Area, V_e : Effective Core Volume

A_L : Inductance Factor 

Explanation of Part Numbers: Digits 1 & 2 = product class and 3 & 4 = material grade.

Electrical Properties	
A_L (nH)	4100 ±25%
A_e (cm ²)	0.648
$\Sigma l/A$ (cm ⁻¹)	4.8
l_e (cm)	3.12
V_e (cm ³)	2

Electrical Properties	
$A_{\min}(\text{cm}^2)$	0.51

A_L value is measured at 1 kHz, $B < 10$ gauss.

Fair-Rite Products Corp. • One Commercial Row, Wallkill, New York 12589-0288
888-324-7748 • 845-895-2055 • Fax: 845-895-2629 • ferrites@fair-rite.com • www.fair-rite.com