

# Flat Cable EMI Suppression Cores

## (2643168651)

Part Number: 2643168651

43 SPLIT FLAT CABLE CORE

Explanation of Part Numbers:

- Digits 1 & 2 = Product Class
- Digits 3 & 4 = Material Grade

**Flat cable suppression core can accommodate multi-conductors flat cables, in widths from 12.7 mm (0.500) up to 77 mm (3.0). These flat cable cores are available in two ferrite material grades to reduce conducted EMI from 1 MHz to hundreds of MHz.**

Our Expanded Cable & Suppressor Kit (part number 0199000005) contains a selection of these flat cable cores and clips.

Flat Cable Cores are available in selected sizes in the Flex Circuit & Ribbon Cable Core Kit (part number 0199000038).

Assembly clips are available for most of the split flat cable cores. See section Flat Cable Cores Assembly clips.

[Catalog Drawing](#)  
[3D Model](#)

Weight: 45 (g)

Dim	mm	mm tol	nominal inch	inch misc.
A	38.85	±0.75	1.53	-
B	26.15	±0.75	1.03	-
C	28.6	±0.70	1.126	-
D	13	±0.30	0.512	-
E	6.35	+0.25	0.255	-

Cable Information			
Max Diameter	Max Dimension	Solid Equivalent	Flat Cable Cores
0	25.40 x 12.20	-	-



### Chart Legend

+ Test frequency

•For assembly clips see Flat Cable Cores Assembly Clips


Typical Impedance ( $\Omega$ )	
10 MHz	75
25 MHz <sup>+</sup>	117
100 MHz <sup>+</sup>	192
250 MHz	258

Flat cable suppression cores, split or single cores, are controlled for impedances only. Minimum impedance values are specified for the + marked frequencies. The minimum impedance is typically the listed impedance less 20%.

### [Catalog Drawing](#)

Centered, single turn impedance tests for the 31 and 43 material parts are performed on the E4990A Impedance Analyzer. All tests are made with the shortest practical wire length.

Typical Impedance ( $\Omega$ )	
10 MHz	57
25 MHz <sup>+</sup>	100
100 MHz <sup>+</sup>	188
250 MHz	295

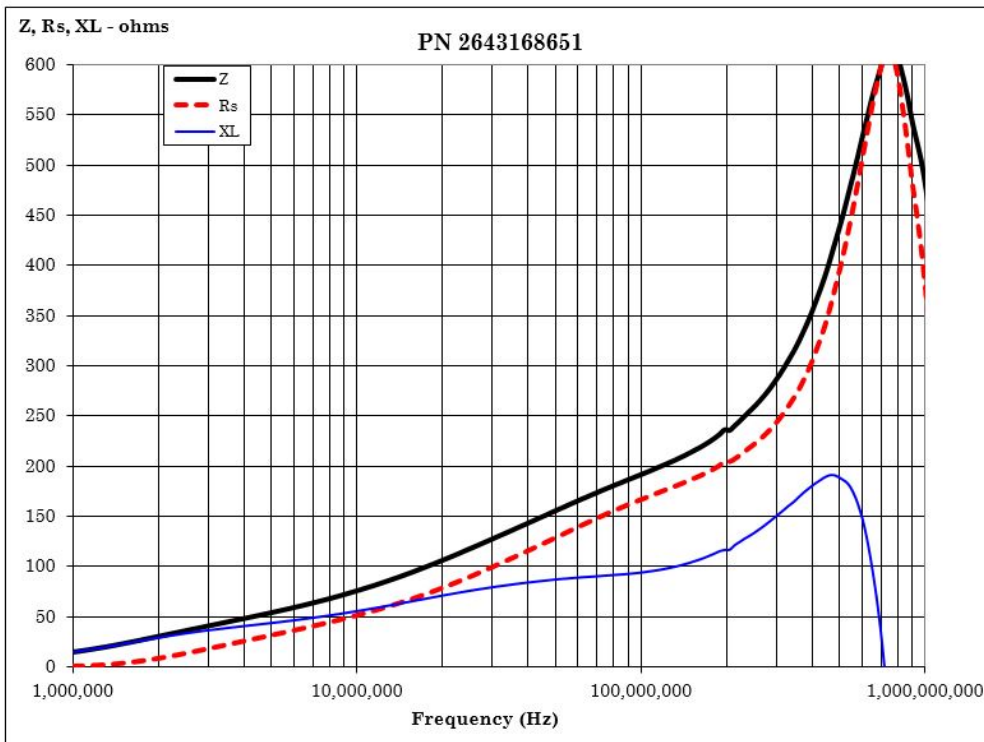

### [CSV Download](#)

