

EMI Suppression Beads

(2661000701)

Part Number: 2661000701

61 SHIELD BEAD

Explanation of Part Numbers:

- Digits 1 & 2 = Product Class
- Digits 3 & 4 = Material Grade
- Last digit 1= Not Burnished 2 = Burnished
- The last digit of the Parylene coated part is a "4," which is available upon request. The minimum coating thickness beads is 0.005 mm (0.0002").

Fair-Rite offers a broad selection of ferrite EMI suppression beads with guaranteed minimum impedance specifications.

□Our "Shield Bead Kit" (part number 0199000019) contains a selection of these beads.

□For any EMI suppression bead requirement not listed here, feel free to contact our customer service for availability and pricing.

The C dimension, the bead length, can be modified to suit specific applications.

Weight: 0.38 (g)

Dim	mm	mm tol	nominal inch	inch misc.
A	3.5	±0.20	0.138	-
B	1.3	±0.10	0.051	-
C	12.7	±0.35	0.5	-

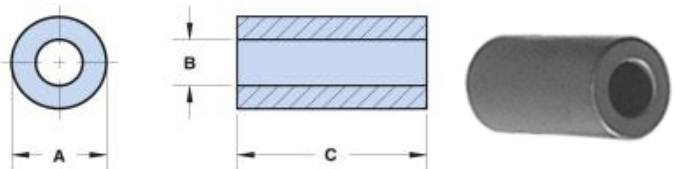


Chart Legend

+ Test frequency

• The column "H (Oe)" gives for each bead the calculated dc bias field in oersted for 1 turn and 1 ampere direct current. The actual dc H field in the application is this value of "H" times the actual NI (ampere-turn) product. For the effect of the dc bias on the impedance of the bead material, see figures 18-23 in the application note □How to choose Ferrite Components for EMI Suppression□.


Typical Impedance (Ω)	
100 MHz	134
250 MHz ⁺	174
500 MHz ⁺	206
1000 MHz	230

Electrical Properties	
H(Oe)	2

Suppression beads are controlled for impedances only. Minimum impedance values are specified for the + marked frequencies. The minimum impedance is typically the listed impedance less 20%.

Single turn impedance tests for 73 and 43 material beads are performed on the E4990A Impedance Analyzer. The 61 material beads are tested on the E4991A / HP4291B Impedance Analyzer. Beads are tested with the shortest practical wire length.

Typical Impedance (Ω)	
100 MHz	120
250 MHz ⁺	158
500 MHz ⁺	178
1000 MHz	185

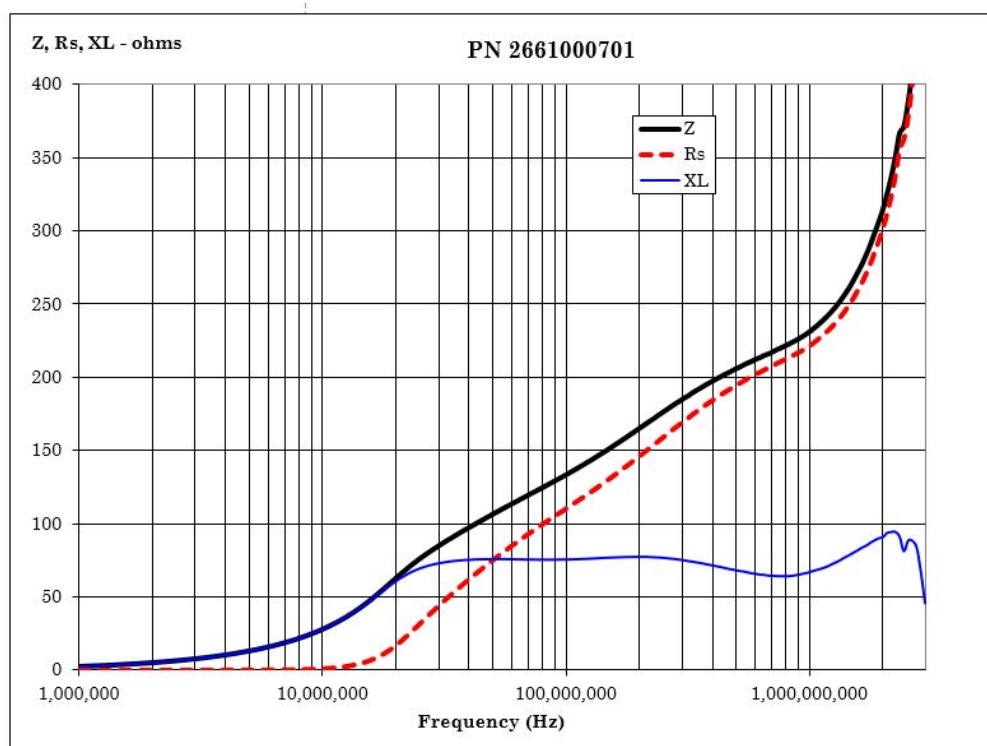

[CSV Download](#)